


# LED Steady/Flashing Tower Light

## EST56L

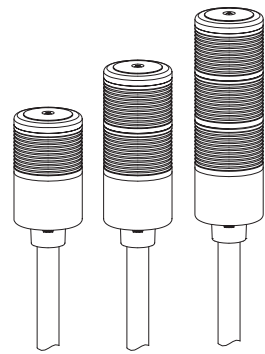

Thank you for purchasing Qlight's products. Please read this user manual carefully prior to installation and operation to ensure safe and correct use.

### ⚠ Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury.

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)

### ⚠ Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

### Ordering Specifications

| EST56L   | - | 3  | - | 220  | - | RAG   | - | LW18   | - | BK   |
|--|---|--|---|--|---|---|---|--|---|--|
| [Model number]   |   | [Layers]   |   | [Voltage]  |   | [Color]   |   | [Mounting option]  |   | [Housing/cover color]  |
| <ul style="list-style-type: none"> <li>• EST56L</li> <li>• EST56LF</li> <li>• EST56L-BZ</li> <li>• EST56LF-BZ</li> </ul> |   | <ul style="list-style-type: none"> <li>• 1-1 Layers</li> <li>• 2-2 Layers</li> <li>• 3-3 Layers</li> </ul> |   | <ul style="list-style-type: none"> <li>• 24-DC24V</li> <li>• 220-AC220V</li> </ul> |   | <ul style="list-style-type: none"> <li>• R-Red</li> <li>• A-Amber</li> <li>• G-Green</li> </ul> |   | <ul style="list-style-type: none"> <li>• None - Standard type</li> <li>• Bracket -LB18 -LW18</li> <li>          -QZ18 -SZ18</li> <li>          -QL18 -SL18</li> <li>          -FB18</li> </ul> |   | <ul style="list-style-type: none"> <li>• None-Ivory</li> <li>• BK-Black</li> </ul> |



Please scan the QR code for more detailed product information.

[www.qlight.com](http://www.qlight.com)

## Product Specifications

| Model number                          | Layers | Voltage | Current | Certificate | Weight | Color                       |
|---------------------------------------|--------|---------|---------|-------------|--------|-----------------------------|
| EST56L<br>Steady                      | 1      | DC24V   | 0.055A  | CE          | 0.29kg | R-Red                       |
| EST56L-BZ<br>Steady w/built-in buzzer | 2      |         | 0.110A  |             | 0.32kg | R-Red<br>G-Green            |
| EST56LF<br>Steady/Flashing            | 3      |         | 0.165A  |             | 0.36kg | R-Red<br>A-Amber<br>G-Green |
| EST56L<br>Steady                      | 1      | AC220V  | 0.025A  | -           | 0.30kg | R-Red                       |
| EST56L-BZ<br>Steady w/built-in buzzer | 2      |         | 0.060A  |             | 0.33kg | R-Red<br>G-Green            |
| EST56LF<br>Flashing                   | 3      |         | 0.075A  |             | 0.37kg | R-Red<br>A-Amber<br>G-Green |

### • Signal/Audible Line Current(per each layer)

| Voltage              | DC12V | DC24V |
|----------------------|-------|-------|
| Signal line current  | 60mA  | 25mA  |
| Audible line current | 75mA  | 25mA  |

- Protection rating : IP23
- Ambient operating temperature : -30°C to +50°C




## Dimensions

(Units : mm)


EST56LF-BZ-1-R : DC/AC  
EST56LF-1-R : DC/AC  
EST56L-BZ-1-R : DC/AC  
EST56L-1-R : DC/AC

EST56LF-BZ-2-RG : DC/AC  
EST56LF-2-RG : DC/AC  
EST56L-BZ-2-RG : DC/AC  
EST56L-2-RG : DC/AC

EST56LF-BZ-3-RAG : DC/AC  
EST56LF-3-RAG : DC/AC  
EST56L-BZ-3-RAG : DC/AC  
EST56L-3-RAG : DC/AC

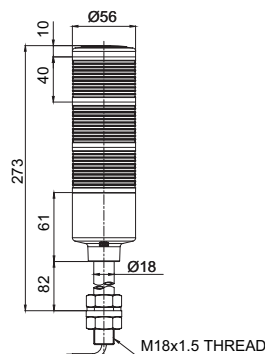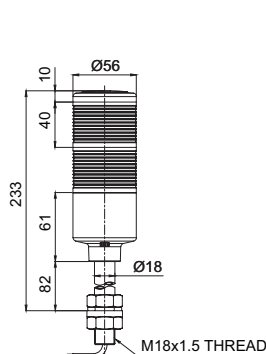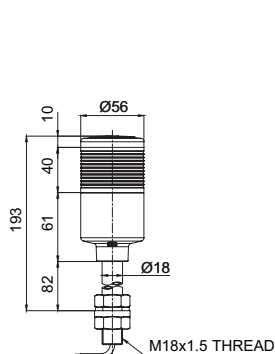

## Parts Definition

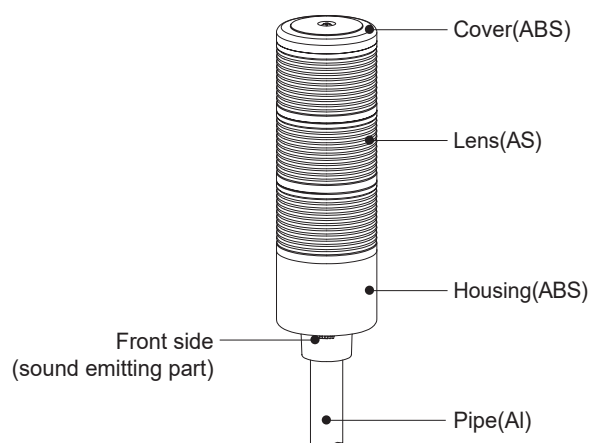

## Installation Environment and Protection Rating

- This product is designed for indoor use with protection rating of IP23.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated, it may cause malfunction or damage to the product.
- For further information, please visit our website ([www.qlight.com](http://www.qlight.com)).

## Wiring Instructions

### ■ Wiring using external contact

- In case of wiring with external contacts, refer to the wiring diagrams below according to your product's type and voltage setting.

|                       | Wiring diagrams |  |
|-----------------------|-----------------|--|
| DC Steady             |                 |  |
| EST56L<br>EST56L-BZ   |                 |  |
| DC Steady/Flashing    |                 |  |
| EST56LF<br>EST56LF-BZ |                 |  |

### ■ Wiring using transistor








- When using a transistor, please choose between the NPN or PNP type transistor which best matches the voltage and product type, then connect them correctly according to the wiring diagrams below.

|                       | Wiring diagrams |  |
|-----------------------|-----------------|--|
| DC Steady             |                 |  |
| EST56L<br>EST56L-BZ   |                 |  |
| DC Steady/Flashing    |                 |  |
| EST56LF<br>EST56LF-BZ |                 |  |

- External power line - UL1015 AWG18(0.75sq) x 2C 400mm
- External signal line - AWG22(0.3sq) 400mm

## Mounting Accessories (Sold Separately)

- Please refer to the dimensions below for installation of mounting brackets.
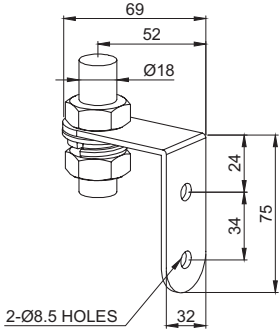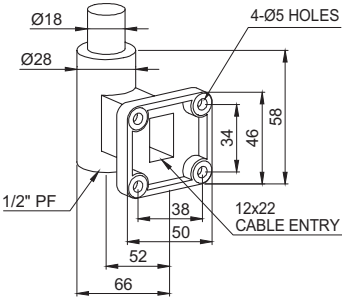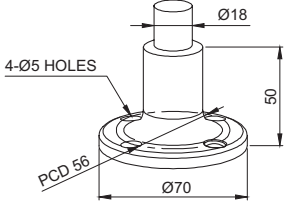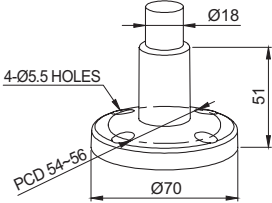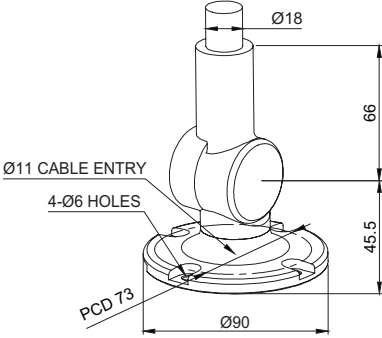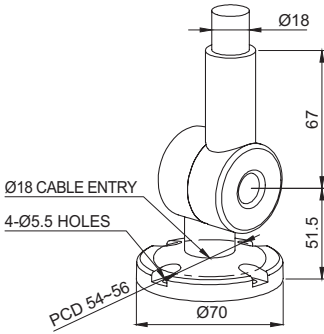
|        | Dimensions   |   |
|--------|--|---|
| EST56L |  <p>M18x1.5<br/>THREAD</p> <p>Ø18</p>   |  <p>69</p> <p>52</p> <p>Ø18</p> <p>2-Ø8.5 HOLES</p> <p>24</p> <p>34</p> <p>32</p> <p>75</p>          |
|        | 18mm SCREW & NUT   | LB18  |
|        |  <p>Ø18</p> <p>Ø28</p> <p>4-Ø5 HOLES</p> <p>1/2" PF</p> <p>58</p> <p>34</p> <p>46</p> <p>38</p> <p>50</p> <p>52</p> <p>66</p> <p>12x22<br/>CABLE ENTRY</p> |  <p>Ø18</p> <p>4-Ø5 HOLES</p> <p>PCD 56</p> <p>Ø70</p> <p>50</p>                                    |
|        | LW18   | SZ18  |
|        |  <p>Ø18</p> <p>4-Ø5.5 HOLES</p> <p>PCD 54-56</p> <p>Ø70</p> <p>51</p>   |  <p>Ø18</p> <p>Ø11 CABLE ENTRY</p> <p>4-Ø6 HOLES</p> <p>PCD 73</p> <p>66</p> <p>45.5</p> <p>Ø90</p> |
|        | QZ18   | SL18  |
|        |  <p>Ø18</p> <p>Ø18 CABLE ENTRY</p> <p>4-Ø5.5 HOLES</p> <p>PCD 54-56</p> <p>67</p> <p>51.5</p> <p>Ø70</p>  |   |
|        | QL18   |   |


## Product installation direction

- Install the product in accordance with the manual. Otherwise rainwater or moisture may penetrate into the product.

### · BEACON/SIGNALING LIGHT



※ For products with a protection rating of less than IPX4, please install it vertically.

Power cord inlet part shall not be facing the sky.

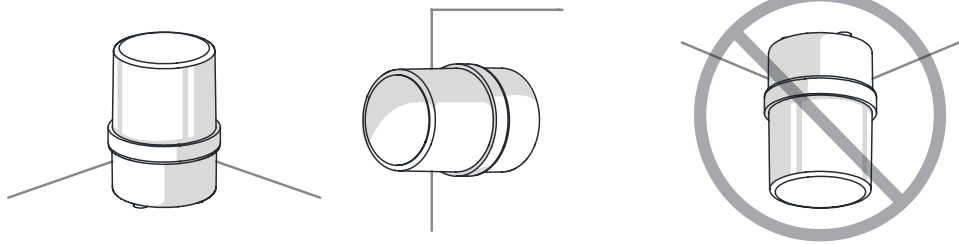


### · ELECTRONIC SOUNDER/SIGNAL HORN

Sounder part shall not be facing the sky.

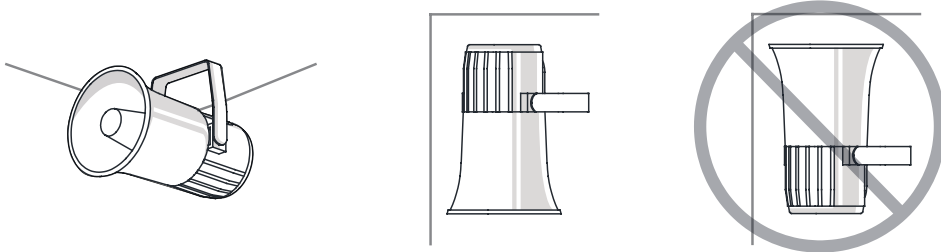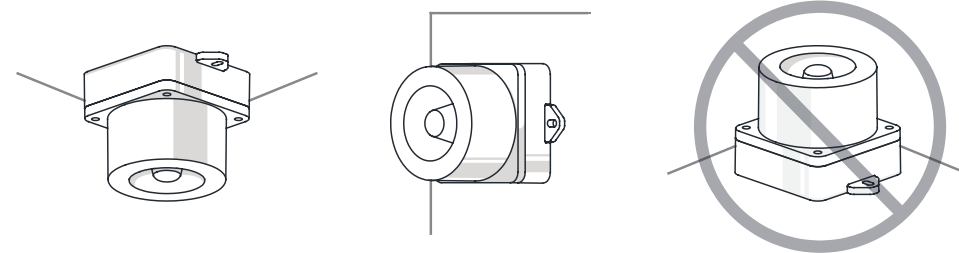

### · HEAVY-DUTY & EXPLOSION PROOF SIGNALINGS


Sounder part shall not be facing the sky.

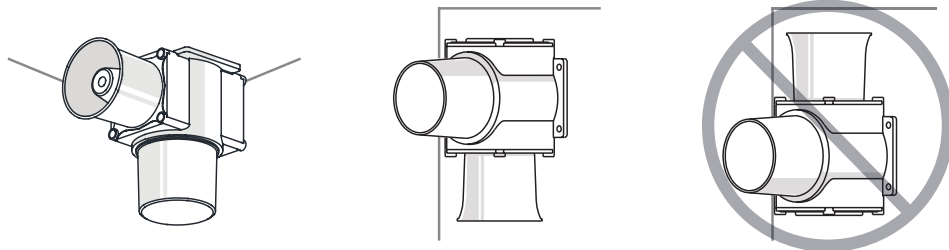

### · SIGNAL TOWER LIGHTS

※ For products with a protection rating of less than IPX4, please install it vertically.

Power cord inlet part shall not be facing the sky.

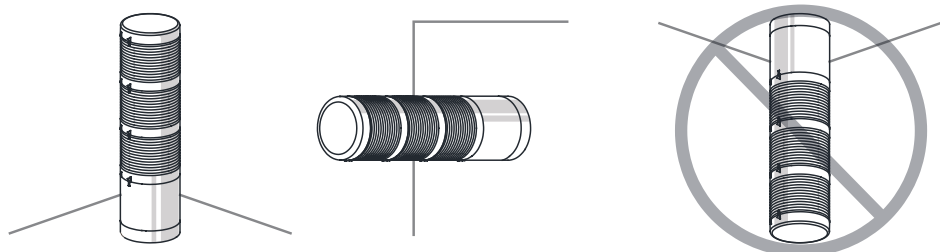







For your safety

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.  
The newest product information is available on our website.(www.qlight.com)  
Please read the instruction manual attached to the product carefully before installation and use.

*Qlight Co., Ltd. www.qlight.com | trade@qlight.com*

Head Office | Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea

Tel. +82-2-2679-6152(Toll free. +82-80-328-2222) Fax. +82-2-2679-6154

Factory | 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnamdo, Korea Tel. +82-55-328-1111(Toll free. +82-80-328-1111)

Qlight Overseas Sales Dept | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel : +82-51-620-4100

Qlight Public Relations & Marketing Team Office | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel. +82-51-245-0017

---

*SHANGHAI Qlight Electronic Co., Ltd. www.qlight.com www.qlightcn.com | qlightcn@qlight.com*

China Factory/ Shanghai Sales Office | #Room 333 Building B, #11, Lane 450, Zhenda Road, Baoshan District, Shanghai, China

Tel. +86-21-6651-7100 Fax. +86-21-6315-3929

China Factory Site 2 (Qidong) | #33, Haiyan Road, Qidong High-tech Industrial Development Zone, Qidong, Jiangsu Province, China

Tel +86-513-8384-9999 Fax +86-513-8384-9910

# Qlightec

Innovation in Alarm & Signal

Product Operation Inquiry / Customer Support +82-51-620-4100

You can expect prompt service if you have exact information such as model name, symptom, telephone number and address.

※ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Head office : Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea (Postal Code : 08507)

Factory : 185-25, Mukbang-Ro, Sangdong-Myeon, Gimhae-Si, Gyeongsangnam-Do, Korea (Postal Code : 50805)

www.qlight.com

EN - EST56L - 2405A