

1

2

3

4

5

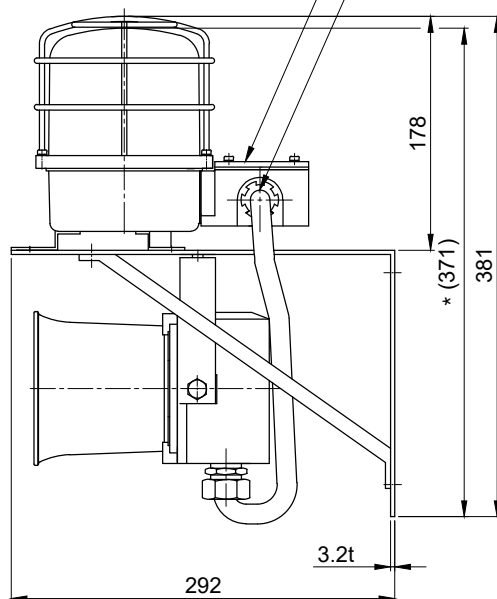
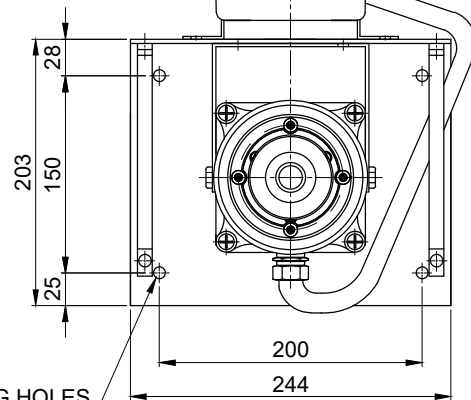
6

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				



MODEL NO			SC3			
MATERIAL			HOUSING-AL			
			LENS-PC			
			REFLECTOR-HEAT RESISTING ABS			
			PROTECTION CAGE-SUS316L			
			BRACKET-STEEL			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    )			
REV. PER MIN			120 ~ 140			
USE VOLT.	BULB	CURRENT	DC12V	15W	3.755A	
			DC24V		1.788A	
			AC110V		0.430A	
			AC220V		0.215A	
VOLUME			MAX. 118dB			
PROTECTION GRADE			WATER & DUST PROOF IP56 (VARIOUS IP RATING AS PER CONFIGURATION)			
CABLE ENTRY			PF 1/2"			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB REVOLVING WARNING LIGHT			

PROTECTION CAGE

TERMINAL BOX

CABLE ENTRY  
PF 1/2"4-φ9  
FITTING HOLES

※ \*(371) represents size without protection cage.

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY Y.C.KO	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021. 3. 24.	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. SC3_OUT			
	10~50	±0°30'		±1°	±2°				SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

A4(297X210)