






MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	QLV-1250			
MATERIAL	BODY - PC			
	MODULE BODY - DIECAST AL			
	BOARD - AL			
FLASHES PER MIN	60 ~ 80			
USE VOLT.	LED	CURRENT (MODULE 24EA)	DC12V	MAX. 13A
WORKABLE TEMP.	-30°C ~ +50°C			
PROTECTION GRADE	WATER & DUST PROOF IP56			
CABLE ENTRY	20C CABLE GLAND			
ACTION	LED STROBE & LED STEADY			




ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
FOR LINEAR DIMENSIONS		f	m	(C)	v	
	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4	
	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

-							
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE	
DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2016.10.05		
TITLE QLV-1250 OUTLINE DRAWING 				MODEL QLV-1250			
				DWG. NO. QLV-1250_OUT			
				SCALE N/S	SIZE A4	REV 00	SHEET 1/1

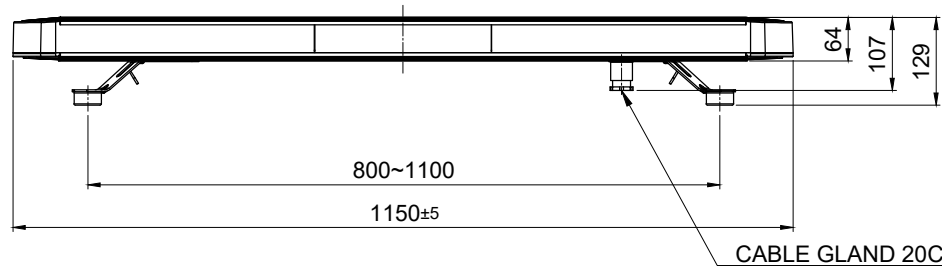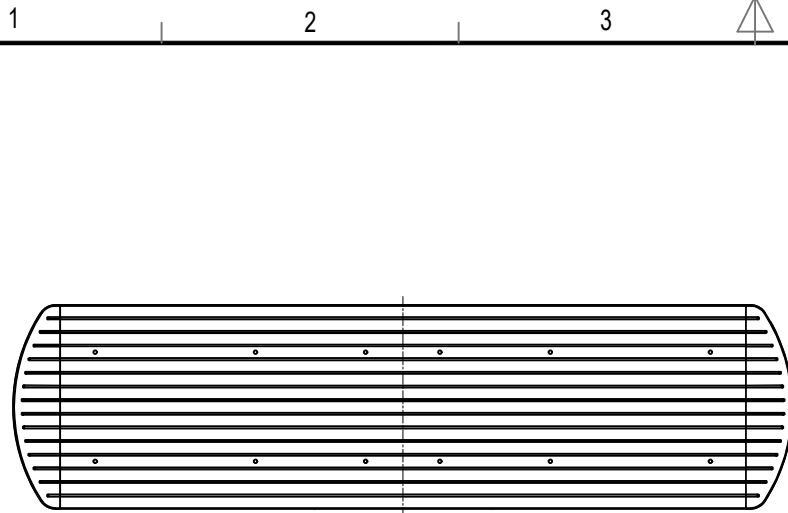



MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	QLV-1150			
MATERIAL	BODY - PC			
	MODULE BODY - DIECAST AL			
	BOARD - AL			
FLASHES PER MIN	60 ~ 80			
USE VOLT.	LED	CURRENT (MODULE 24EA)	DC12V	13A
WORKABLE TEMP.	-30°C ~ +50°C			
PROTECTION GRADE	WATER & DUST PROOF IP56			
CABLE ENTRY	20C CABLE GLAND			
ACTION	LED STROBE & LED STEADY			



ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	(C)	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS					
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'




SURFACE FINISH	-								
	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE		
	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE			
	S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20			
	TITLE QLV-1150 OUTLINE DRAWING				MODEL QLV-1150				
					DWG. NO. QLV-1150_OUT				
	SCALE		SIZE		REV		SHEET		
	N/S		A4		00		1/1		



Qlight

A4(297X210)

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

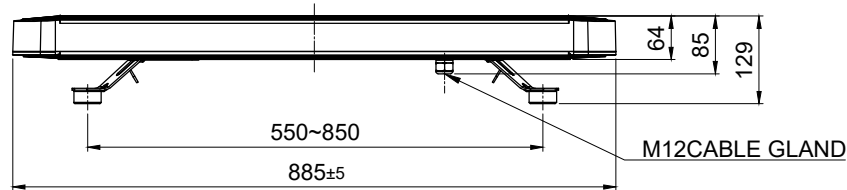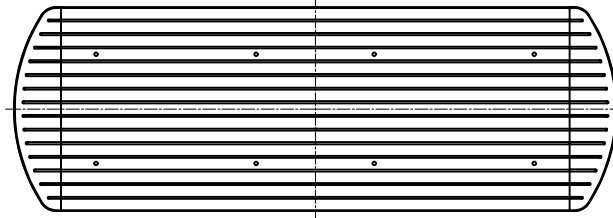MODEL NO	QLV-885			
MATERIAL	BODY - PC			
	MODULE BODY - DIECAST AL			
	BOARD - AL			
FLASHES PER MIN	60 ~ 80			
USE VOLT.	LED	CURRENT (MODULE 24EA)	DC12V	13A
WORKABLE TEMP.	-30°C ~ +50°C			
PROTECTION GRADE	WATER & DUST PROOF IP56			
CABLE ENTRY	20C CABLE GLAND			
ACTION	LED STROBE & LED STEADY			



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH							
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE	
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20		
	3~6			±0.3	±0.5								
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
400~1000	±0.3	±0.8	±2	±4									
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QLV-885_OUT				
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								
									SCALE N/S	SIZE A4	REV 00	SHEET 1/1	

Qlight

A4(297X210)