



FLTS

PRODUCT SPECIFICATION

FLTS

Materials Lens-PC, Housing-ABS**Ambient operating temperature** -30°C to +50°C**Protection rating** IP65**Compliant with RoHS directive**

- Attractive appearance with compact size
- Easy installation by adopting connector type power line
- Excellent visibility of the front/side indicator by adopting special diffused lens

FLTS LED Steady Type Turn Signal Light

Model number	Voltage	Current	Certificates	Weight	Color
FLTS	DC12V	100mA		0.12kg	● A - Amber
	DC24V	50mA			


※ DC12V has a free-voltage range of DC10V-DC13.2V

※ DC24V has a free-voltage range of DC21.6V-DC26.4V

Technical Diagram

Units: mm

·FLTS

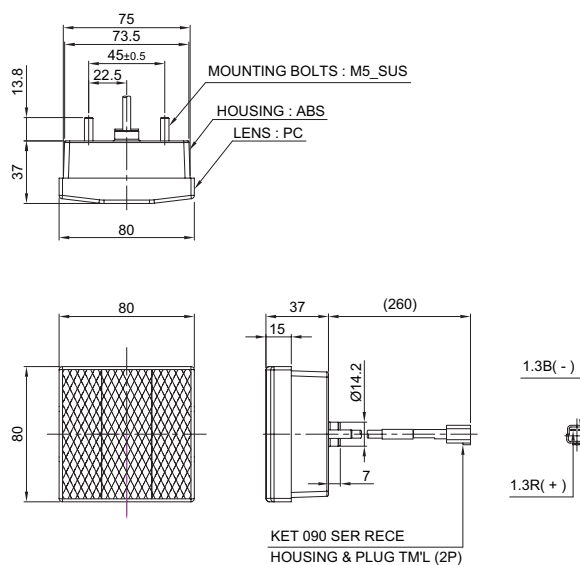

Wiring Instructions

- External power line UL2464 AWG20 (0.5sq) x 2C 250mm
- This product can be wired regardless of polarity.
- Connector - KET 090 SER RECE /HOUSING & PLUG TM'L (2P)

Ordering Specification

FLTS	-	12	-	A
[Model number]		[Voltage]		[Color]
FLTS		12-DC12V 24-DC24V		● A-Amber