

Ø80mm Multiple Color LED Steady/Flashing Tower Lights

STC80ML



STC80ML Ø80mm Direct Mount, Multiple Color LED Steady/Flashing

Model number	Colors	Voltage	Certificates	Weight	Color
STC80ML Steady STC80ML-BZ Steady w/built-in buzzer	2	DC12V DC24V AC110V AC220V	CE	0.40kg	R-Red G-Green
STC80MLF Steady/Flashing STC80MLF-BZ Steady/Flashing w/ built-in buzzer		DC12V DC24V AC110V AC220V			R-Red A-Amber G-Green

※ CE Compliant: DC24V



STC80ML Series

Built-in buzzer output holes formed on the housing of the product



Light source/buzzer current(Each LED module's current)



Voltage	DC12V	DC24V	AC110V	AC220V
Light source current	310mA	250mA	60mA	30mA
Buzzer current	40mA	75mA	45mA	25mA

Technical Diagram

Units : mm

·STC80ML-AC/DC
·STC80MLF-AC/DC

·STC80ML-BZ-AC
·STC80MLF-BZ-DC



Wiring Instructions

- External power line UL1015 AWG18(0.75sq) x 2C 400mm
- External signal line UL1007 AWG22(0.3sq) 400mm

Customization

- Available in customized color arrangements
- M12 connector attached type
- 2 buzzer sound types : Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available
- Lens length 40mm(Model number: STC56MEL)
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall



Wall mount bracket TWS80



Wall mount bracket TWA80

Ordering Specifications

STC80ML	3	220	RAG
[Model number]	[Colors]	[Voltage]	[Color]
STC80ML	2-2 Colors	12-DC12V	R-Red
STC80ML-BZ	3-3 Colors	24-DC24V	A-Amber
STC80MLF		110-AC110V	G-Green
STC80MLF-BZ		220-AC220V	

40mm lens height
Standard height of lens is 70mm. 40mm lens can optionally be provided.
(Model number: STC80MEL)



Ø80mm Multiple Color LED Steady/Flashing Tower Lights

STC80L



STC80L Series

Built-in buzzer output holes formed on the housing of the product



Wiring Instructions

- External power line
UL1015 AWG18(0.75sq) x 2C 400mm
- External signal line
UL1007 AWG22(0.3sq) 400mm

Customization

- 2 buzzer sound types :
Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available
- Available in customized color arrangements
- M12 connector attached type
- Customized pole length available
- Lens length 40mm
(Model number: STC80EL)

40mm lens height
Standard height of lens is 70mm. 40mm lens can optionally be provided.
(Model number: STC80EL)



STC80L Ø80mm Pole Mount, Multiple Color LED Steady/Flashing

Model number	Colors	Voltage	Certificates	Weight	Color
STC80L Steady	2	DC12V	CE	0.64kg	● R-Red ● G-Green
STC80L-BZ		DC24V			
Steady w/built-in buzzer		AC110V AC220V			
STC80LF	3	DC12V	CE	0.83kg	● R-Red ● A-Amber ● G-Green
Steady/Flashing		DC24V			
STC80LF-BZ		AC110V			
Steady/Flashing w/built-in buzzer		AC220V			

※ CE Compliant: DC24V


Light source/buzzer current(Each LED module's current)

Voltage	DC12V	DC24V	AC110V	AC220V
Light source current	310mA	250mA	60mA	30mA
Buzzer current	40mA	75mA	45mA	25mA


Technical Diagram

Units : mm

·STC80L-AC/DC
·STC80LF-AC/DC

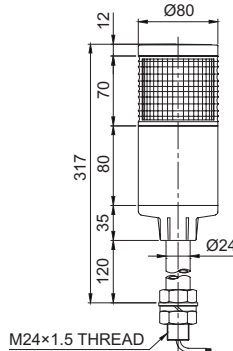

·STC80L-BZ-AC
·STC80LF-BZ-DC

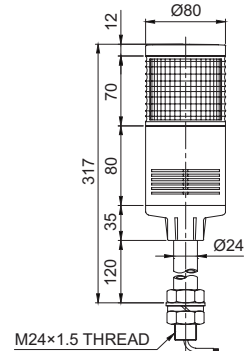

Mounting bracket

Standard	LB24	LW24	QZ24	SZ24	QL24	SL24
Steel	Steel	ABS	ABS	Al	ABS	Al


※ Please refer to [Tower Light Mounting bracket] on this catalogue for detailed dimensions

Ordering Specifications

STC80L	3	220	RAG	LW24
[Model number]	[Colors]	[Voltage]	[Color]	[Bracket]
STC80L	2-2 Colors	12-DC12V	● R-Red	None-Standard
STC80L-BZ	3-3 Colors	24-DC24V	● A-Amber	· Bracket
STC80LF		110-AC110V	● G-Green	-LB24 -LW24
STC80LF-BZ		220-AC220V		-QZ24 -SZ24
				-QL24 -SL24

Wiring Instructions

- STC Series can be wired by using both External Contact and transistor.
- In case of wiring by transistor, please make sure if it is NPN type or PNP type. Please carefully follow wiring instruction below.
- Product can be wired regardless of polarity.

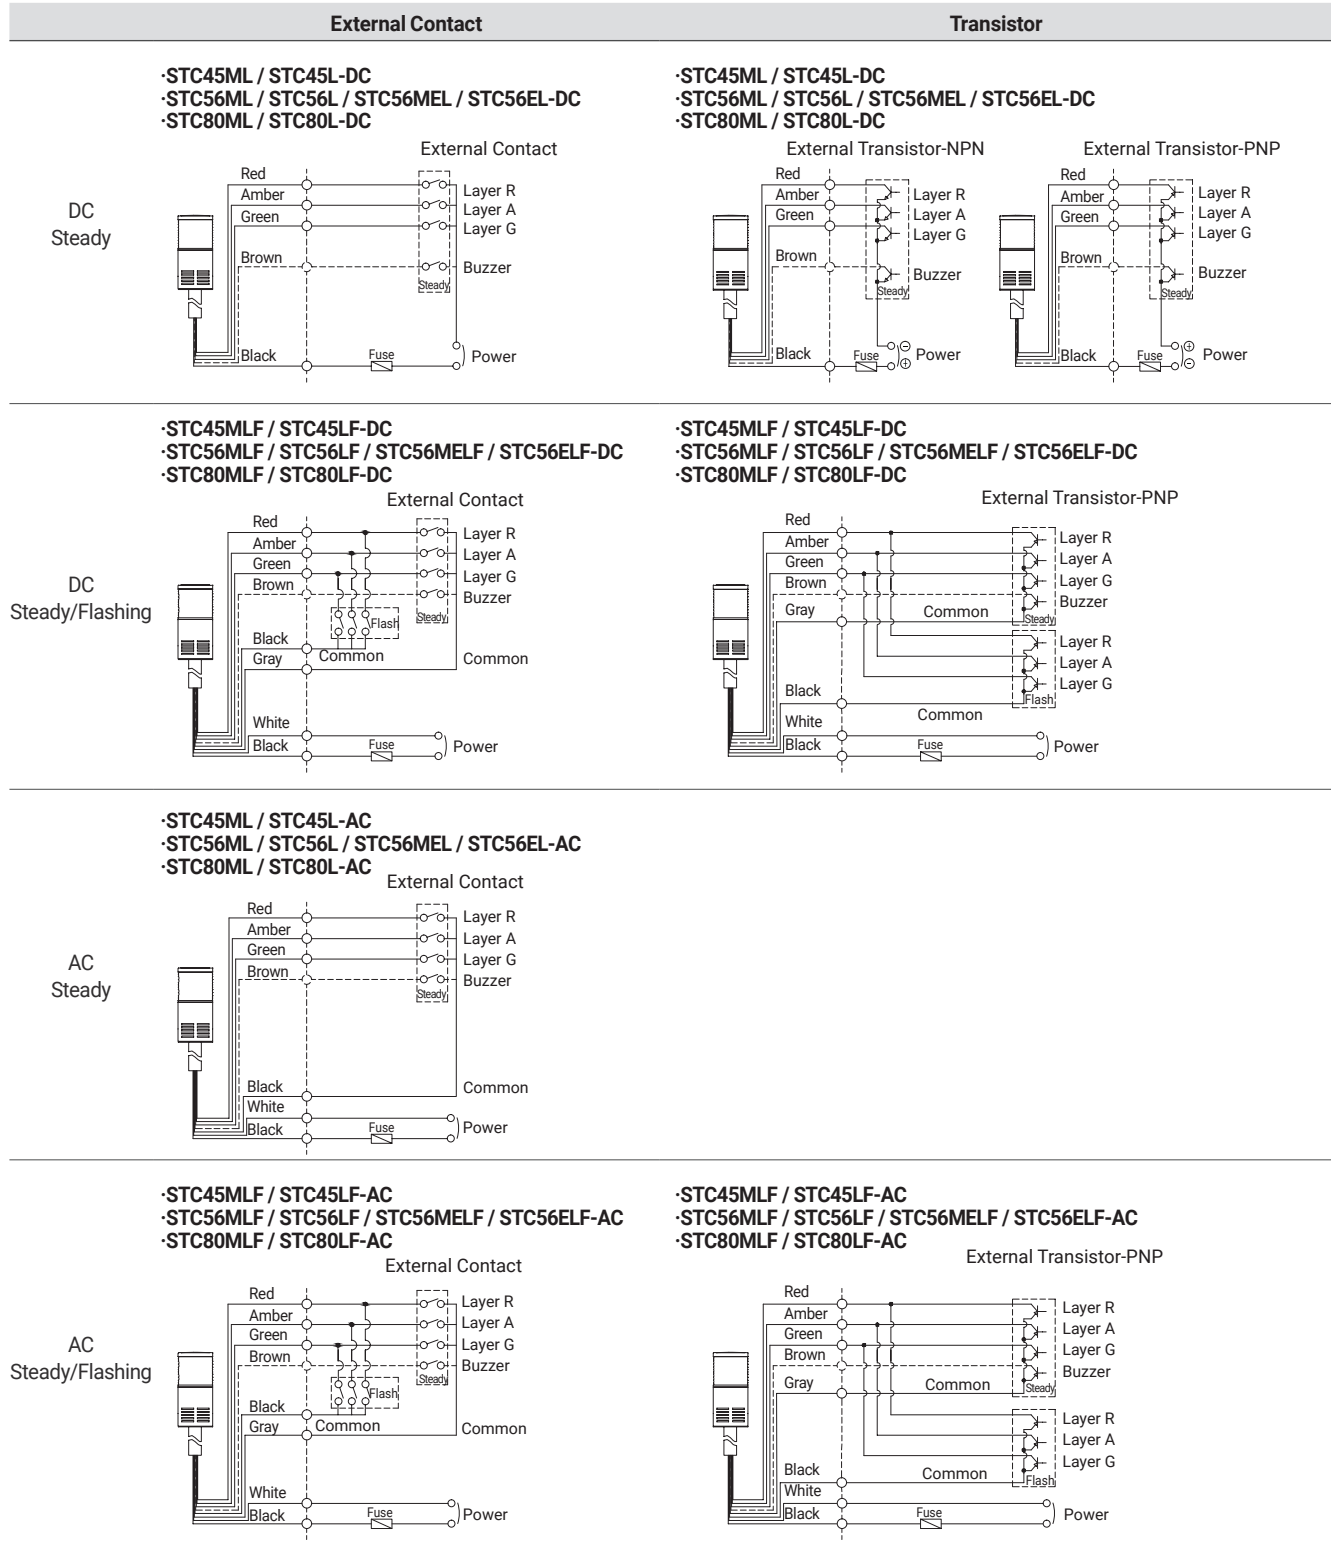

- DC steady type cable specification: External power line/External signal line UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type cable specification: External power line UL1015 AWG18(0.75sq) x 2C 400mm
External signal line UL1007 AWG22(0.3sq) 400mm