


FITTING HOLES
(SCALE 2.5:1)

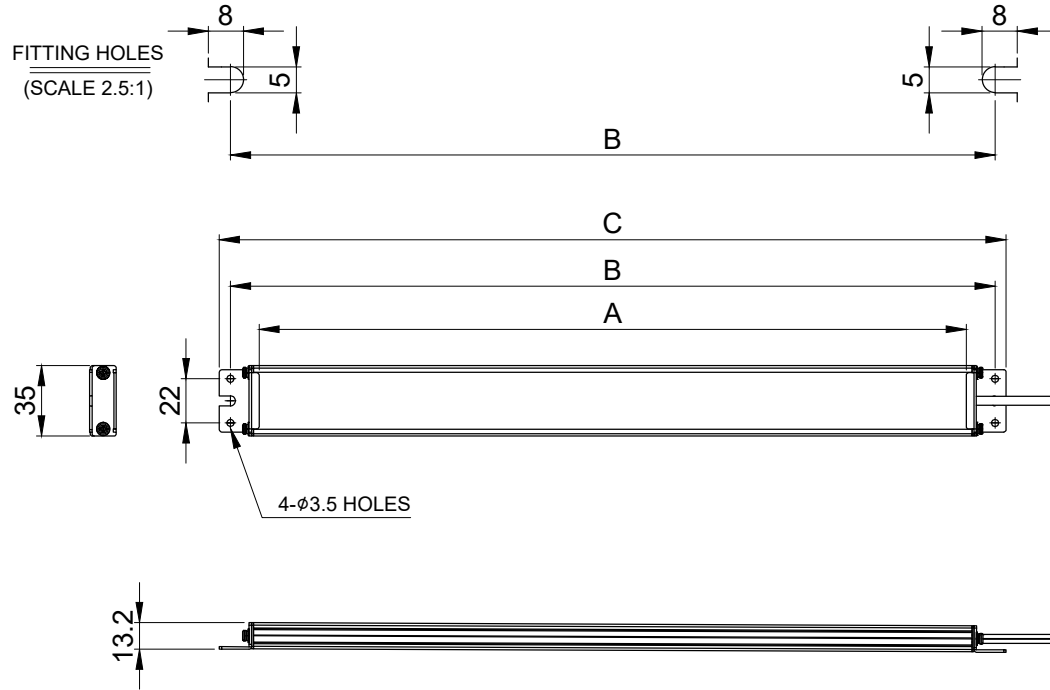

MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO	EPL 380/ 550		
MATERIAL	BODY-AL		
	DIFFUSION PLATE-PC		
	SIDE COVER-SUS304		
MODEL	EPL380	EPL550	
POWER CONSUMPTION	DC24V	15W	24W
LED	CHIP LED		
PROTECTION GRADE	WATER & DUST PROOF IP50		

MODEL	A	B	C
EPL380	352	380	391
EPL550	517	545	556

※POWER CABLE : DC TYPE - UL2464 AWG22(0.3sq X 2C) 450mm

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	c	Ⓧ	Ⓧ	
FOR LINEAR DIMENSIONS	0.5~3			±0.2	-	
	3~6	±0.05	±0.1	±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/NAME	MAT'L	1	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
C.S.GWAK	J.H.PARK		J.K.HAN	3	2025.12.24	
TITLE			MODEL			
EPL OUTLINE DRAWING			EPL			
			DWG. NO.			
			EPL_OUT			
SCALE	SIZE	REV	SHEET			
1/1	A4	00	1/1			

A4(297X210)