

EMCL50T



EMCL50T

PRODUCT SPECIFICATION

EMCL50T

Materials Housing-AL, Lens-PC
Ambient operating temperature -25°C to +55°C
Volume Max. 85dB at 1m
Protection rating IP69K

- Small indicator light capable of transmitting three signal colors with one indicator light
- By applying a translucent lens, the unique color of the LED is emitted subtly when turned on
- Waterproof and dustproof model with fully sealed structure with IP69K degree of protection to cope with harsh environmental conditions
- Additional function model selectable (T: touch function)
- Buzzer specifications can be selected for signal wire withdrawal type or M12 connector mounting type

Bracket

· It can be installed on the wall by adopting wall mounting type bracket.



Φ32 type




Mount bracket

EMCL50T Industrial LED Beacon

Model number	Voltage	Current	Certificates	Weight	Color
EMCL50T Steady	DC12 - 30V	Max.40mA	CE	0.21kg	<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green

Technical Diagram ·EMCL50T

Units: mm

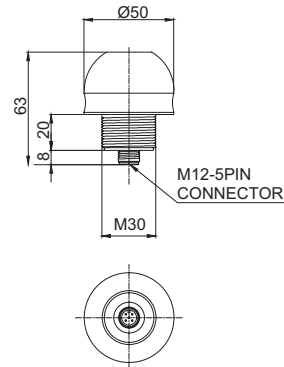

Customization

- M12 Fiev-core cable/1.5m
- NPN type

M12 connector equipped

5PIN CONNECTOR		Color		
No.	Before contact	After contact	Wiring	
2	NONE	RED	Pin 1+Pin 4((-)Common)	
1	GREEN	AMBER		
3			Pin 1+Pin 3 +Pin 4((-)Common)	

Ordering Specification

EMCL50T	-	12/24	-	RAG
[Model number]		[Voltage]		[Color]
EMCL50T		12/24-DC12-30V		<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green