


1 2 3 4 5 6

A

B

C

D

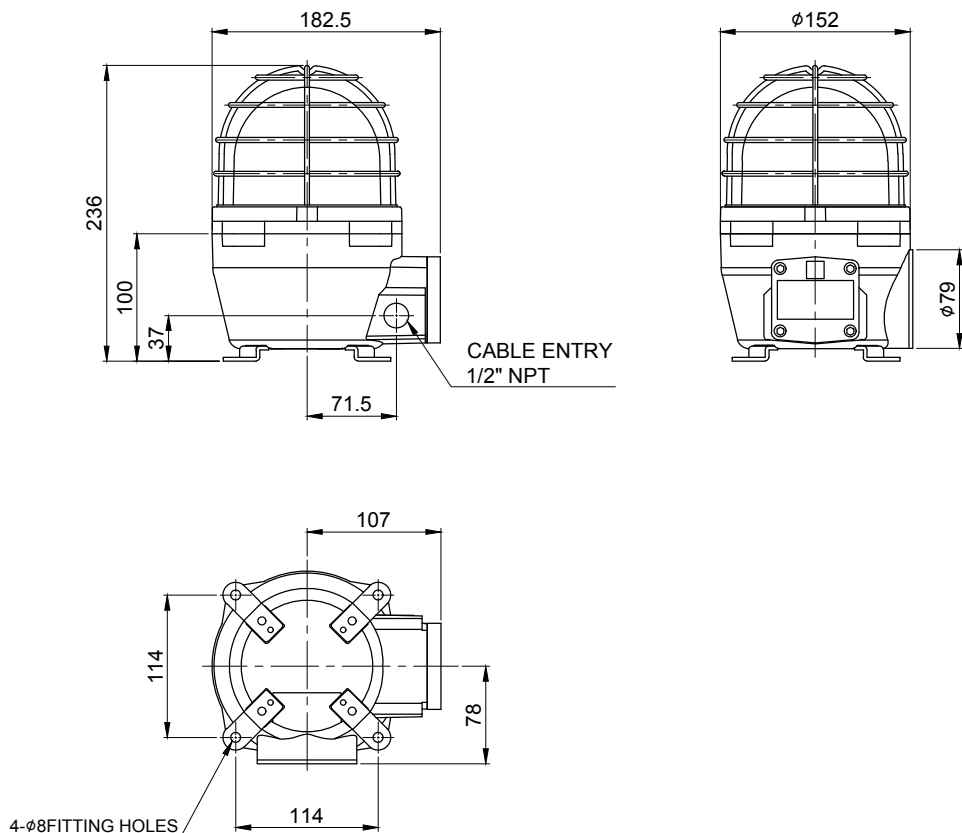

| MARK | DATE | REVISION | REVISER | APP .BY |
|------|------|----------|---------|---------|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |

| | | | | | | |
|-------------------|-----|---------|---|-------|-------------|--|
| MODEL NO | | | SNEL | | | |
| MATERIAL | | | HOUSING-AL | | | |
| | | | LENS-TEMPERED GLASS | | | |
| | | | PROTECTION CAGE-SUS316L | | | |
| | | | REFLECTOR-HEAT RESISTANT ABS | | | |
| COLOR OF LENS | | | RED(), AMBER(), GREEN(), BLUE() | | | |
| FLASHING PER MIN. | | | 60 ~ 80 | | | |
| USE VOLT. | LED | CURRENT | DC12V | 0.08W | MAX. 0.125A | |
| | | | DC24V | | | |
| | | | AC110V | | 0.035A | |
| | | | AC220V | | 0.020A | |
| PROTECTION GRADE | | | WATER & DUST PROOF IP66 | | | |
| CABLE ENTRY | | | 1/2" NPT | | | |
| COLOR OF HOUSING | | | MUNSELL NO. 7.5BG 7/2 | | | |
| ACTION | | | LED STEADY/ FLASHING LIGHT | | | |

| ISO2768-1 : CLASS OF TOLERANCE | | | | | | SURFACE FINISH | | - | - | - | 1 | - |
|--------------------------------|----------|--------|--------|--------|------|----------------|--|-----------------|----------|-------------|---------|------------|
| FOR LINEAR DIMENSIONS | | f | m | (C) | v | | | Nr. | DWG. NO. | TITLE/ NAME | MAT'L | REFERENCE |
| | 0.5~3 | ±0.05 | ±0.1 | ±0.2 | - | | | DSND BY | CHKD BY | CHKD BY | APRV BY | VIEW |
| | 3~6 | | | ±0.3 | ±0.5 | | | S.H.KIM | J.H.PARK | | J.K.HAN | 3 |
| | 6~30 | ±0.1 | ±0.2 | ±0.5 | ±1 | | | | | | | DATE |
| | 30~120 | ±0.15 | ±0.3 | ±0.8 | ±1.5 | | | | | | | 2019.03.20 |
| | 120~400 | ±0.2 | ±0.5 | ±1.2 | ±2.5 | | | | | | | |
| FOR ANGULAR DIMENSIONS | 400~1000 | ±0.3 | ±0.8 | ±2 | ±4 | | | TITLE | | SNEL | | |
| | 0~10 | ±1° | ±1°30' | ±3° | | | | SNEL | | MODEL | | |
| | 10~50 | ±0°30' | ±1° | ±2° | | | | OUTLINE DRAWING | | SNEL | | |
| | 50~120 | ±0°20' | ±0°30' | ±1° | | | | DWG. NO. | | SNEL_OUT | | |
| | 120~400 | ±0°10' | ±0°13' | ±0°30' | | | | SCALE | | SIZE | REV | SHEET |
| | | | | | | | | N/S | A4 | 00 | 1/1 | |

1 2 3 4 5 6 A4(297X210)