

EHL32 / EHL45



EHL32 / EHL45


PRODUCT SPECIFICATION

EHL32 | EHL45

Materials Housing-Al, Lens-Tempered glass
Ambient operating temperature -25°C to +55°C
Protection rating IP67

- Waterproof, dustproof, oil-resistant LED economy type work light
- Low power consumption and long life by using high-efficiency LED
- Semi-permanent service life with long-lasting LED light source
- 1.5m Standard entry cable included. Can customize the product with the M12 connector if requested

EHL32 / EHL45 LED Work Lights

Optics Specifications		
Model number	EHL32	EHL45
Lens color	Transparent	
Light color	Cooldaylight	
Color temperature	6,000-6,500K	
Luminous flux	1,200lm	
Illumination(at 1m)	450Lux	
Specifications		
Model number	EHL32	EHL45
Voltage	DC24V	
Range for operation voltage	DC24V	
Power consumption	12W	
Insulation resistance	Min. 100MΩ(500V DC mega ohm meter)	
Withstanding voltage	DC: 500VAC, 60Hz, 1 minute/AC: 1,500VAC, 60Hz, 1 minute	
Operating temperature	-25°C to +55°C	
Protection rating	IP67	
Materials	Housing-Al, Lens-Tempered glass, Bracket-ST5	
Certification		
Weight(Approx.)	0.30kg	0.60kg


Structural Features




Technical Diagram

Units: mm

·EHL32

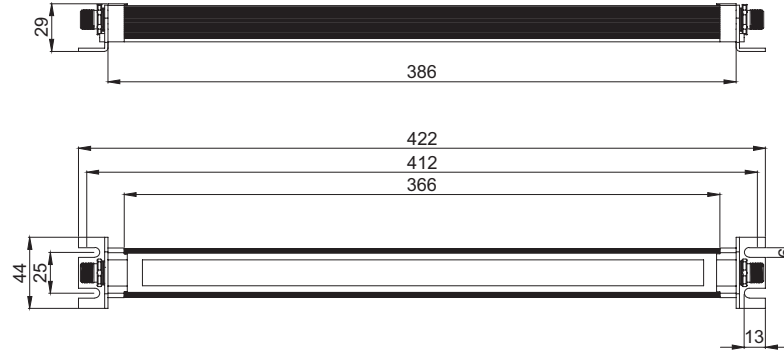

·EHL45

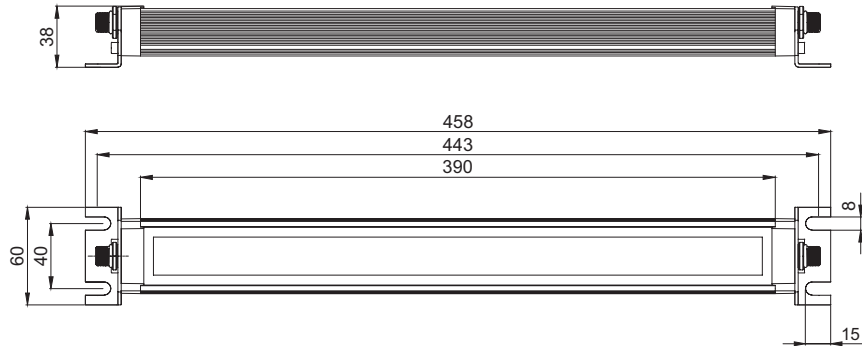

Ordering Specification

EHL32	-	420	-	24
[Model number]		[Product length]		[Voltage]
EHL32 EHL45		420-422mm 450-458mm		24-DC24V