

# EHL32 / EHL45



EHL32 / EHL45

## PRODUCT SPECIFICATION

EHL32 | EHL45


**Materials** Housing-Al, Lens-Tempered glass  
**Ambient operating temperature** -25°C to +55°C  
**Protection rating** IP67

- Waterproof, dustproof, oil-resistant LED economy type work light
- Low power consumption and long life by using high-efficiency LED
- Semi-permanent service life with long-lasting LED light source
- 1.5m Standard entry cable included. Can customize the product with the M12 connector if requested

### EHL32 / EHL45 LED Work Lights

Optics Specifications			
Model number		EHL32	EHL45
Lens Color		Transparent	
Light color		Cooldaylight	
Directions		6,000-6,500K	
Luminous flux	DC	1,200lm	
Efficacy(lm/W)	DC	450Lux	
Specifications			
Model number		EHL32	EHL45
Voltage		DC24V	
Range for operation voltage		DC24V	
Power consumption	DC24V	12W	
Insulation resistance		Min. 100MΩ(500V DC mega ohm meter)	
Withstanding voltage		DC: 500VAC, 60Hz, 1 minute/AC: 1,500VAC, 60Hz, 1 minute	
Operating temperature		-25°C to +55°C	
Protection rating		IP67	
Materials		Housing-Al, Lens-Tempered glass, Bracket-STS	
Certification		CE	
Weight(Approx.)		0.30kg	0.60kg


### Structural features




## Technical Diagram

Units: mm

### • EHL32

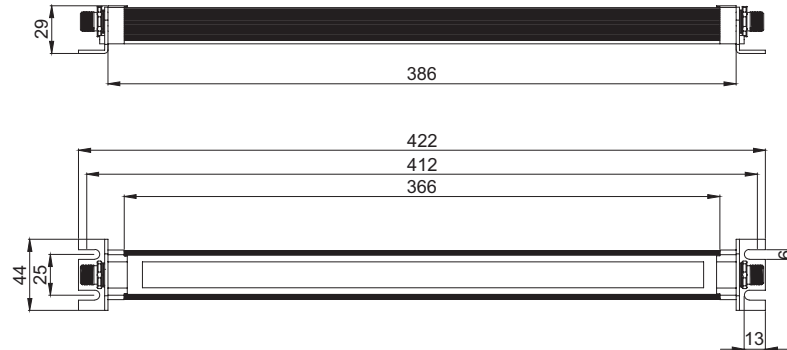

### • EHL45

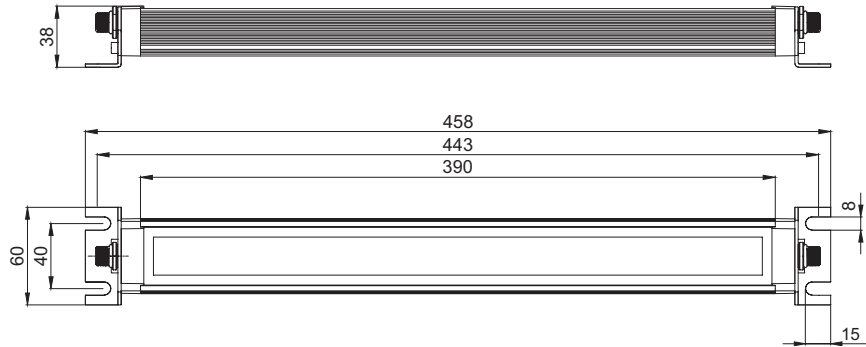

## Ordering Specification

EHL32	-	420	-	24
[Model number]		[Product length]		[Voltage]
EHL32		420-422mm		24-DC24V
EHL45		450-458mm		