


QTR(A)60L-ETN-BZ

QTR(A)60ML-ETN-BZ

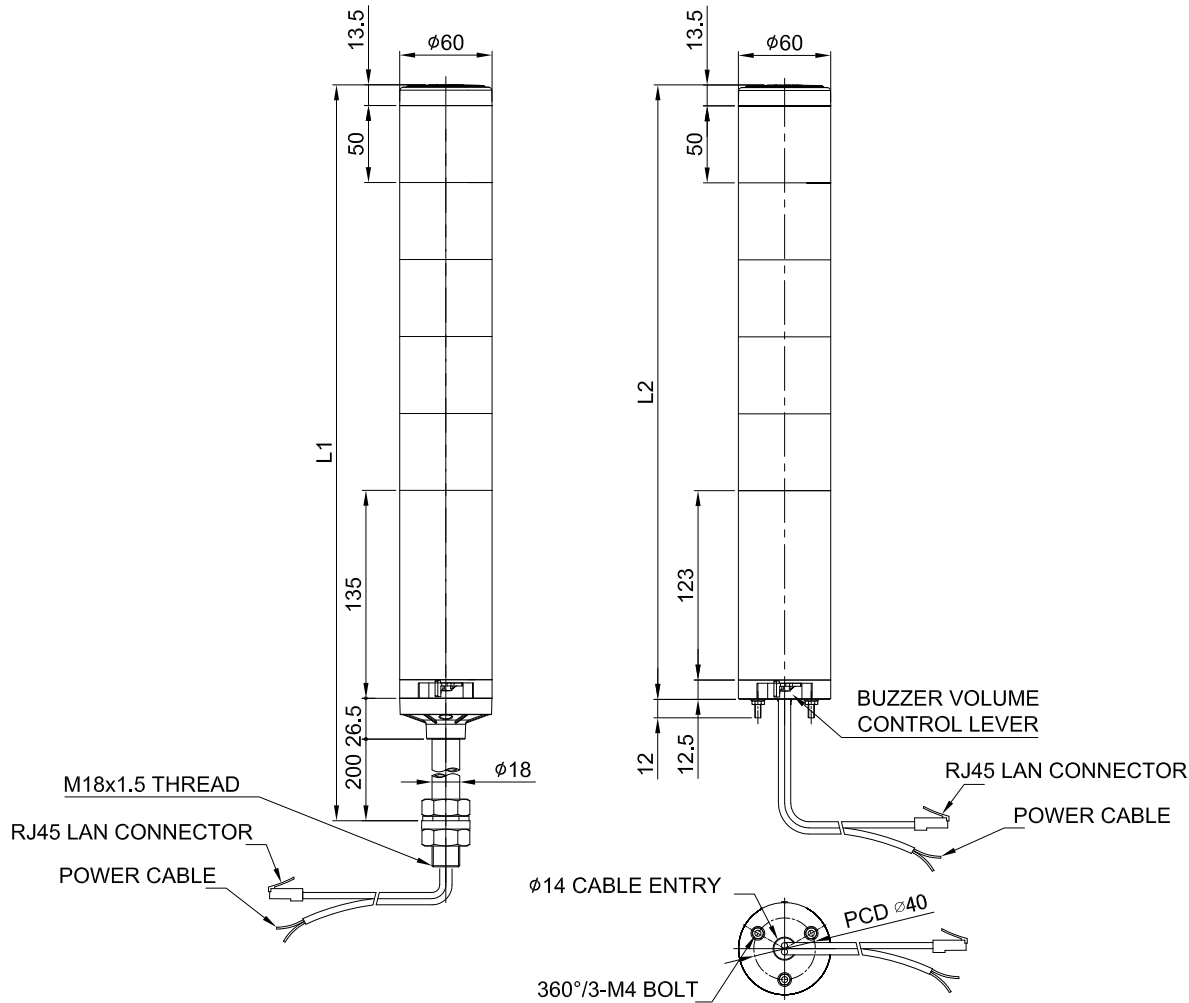

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO	QTR(A)60(M)L-ETN	
MATERIAL	HOUSING-ABS	
	LENS-PC	
	PIPE-AL	
COLOR OF LENS	RED(), AMBER(), GREEN(), BLUE(), WHITE()	
SOUND	BZ	5 Buzzer sounds
VOLUME	MAX. 90dB at 1m	
PROTECTION GRADE	WATER & DUST PROOF IP65 (BZ TYPE-IP54)	
CABLE ENTRY	φ14 LEAD HOLE	
COLOR OF HOUSING	MAKER STANDARD	
ACTION	LED STEADY / FLASHING LIGHT	

LAYER	L1	L2
1	435	199
2	485	249
3	535	299
4	585	349
5	635	399

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE				
	f	m	Ⓞ	v	
0.5-3			±0.2	-	
3-6	±0.05	±0.1	±0.3	±0.5	
6-30	±0.1	±0.2	±0.5	±1	
30-120	±0.15	±0.3	±0.8	±1.5	
120-400	±0.2	±0.5	±1.2	±2.5	
400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°	±1°30'	±3°	
	10-50	±0°30'	±1°	±2°	
	50-120	±0°20'	±0°30'	±1°	
	120-400	±0°10'	±0°13'	±0°30'	

-		-		-		1		-	
Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QTY	REFERENCE		
DSND BY	CHKD BY	CHKD BY		APRV BY	VIEW	DATE			
J.H.PARK	J.H.PARK			J.K.HAN	3	2019.07.10			
TITLE					MODEL				
QTR60(M)L-ETN OUTLINE DRAWING					QTR60(M)L-ETN				
					DWG. NO.				
					QTR60(M)L-ETN_OUT				
SCALE		SIZE	REV	SHEET					
N/S		A4	00	1/1					