



1 2 3 4 5 6

A

SAOL2

SAOL2P



MARK	DATE	REVISION	REVISER	APP. BY
▲				
▲				
▲				

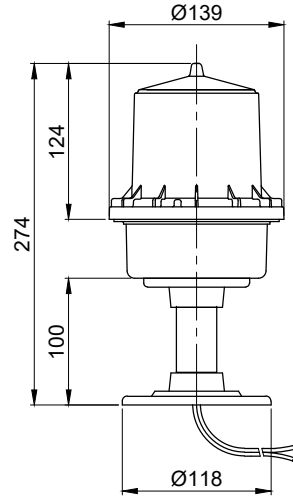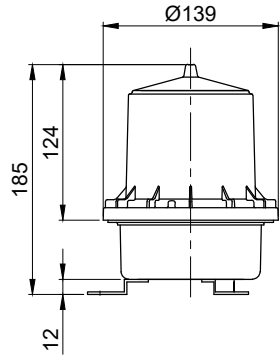

MODEL NO		SAOL2		
MATERIAL		HOUSING-AL		
		LENS-PC		
		POLE-SUS304(SAOL2P ONLY)		
LIGHT SOURCE		LOW INTENSITY A TYPE		
LIGHT COLOR		RED		
USE VOLT.	POWER CONSUMPTION	DC12V	MAX. 24W	
		DC24V		
		AC110V~220V		
LUMINOUS INTENSITY		19cd ±25%		
PROTECTION GRADE		WATER & DUST PROOF IP66		
CABLE ENTRY		SAOL2-CABLE ENTRY PF1/2"		
		SAOL2P-Ø20 CABLE ENTRY		
COLOR OF HOUSING		MAKER STANDARD		
ACTION		LED STEADY LIGHT		

B

C

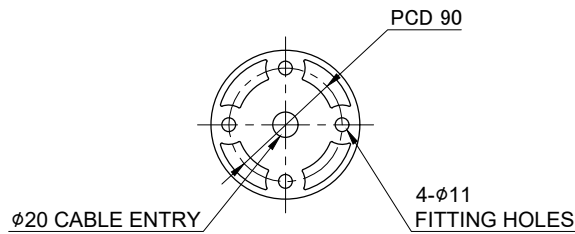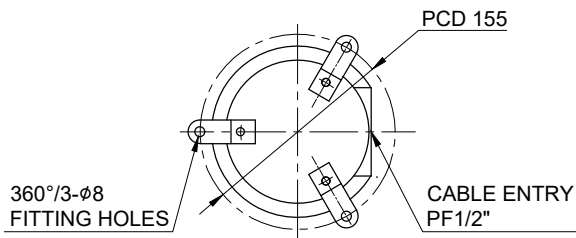

D

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓞ	v		
0.5~3	±0.05	±0.1	±0.2	-		
3~6			±0.3	±0.5		
6~30	±0.1	±0.2	±0.5	±1		
30~120	±0.15	±0.3	±0.8	±1.5		
120~400	±0.2	±0.5	±1.2	±2.5		
400~1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°		
	10~50	±0°30'	±1°	±2°		
	50~120	±0°20'	±0°30'	±1°		
	120~400	±0°10'	±0°13'	±0°30'		

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	1	-
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK	J.K.HAN	J.K.HAN	3	2016.08.30
TITLE			MODEL		
SAOL2 OUTLINE DRAWING			SAOL2		
DWG. NO.			SCALE		
SAOL2_OUT			N/S	A4	REV 00
SCALE			SIZE	REV	SHEET
N/S			A4	00	1/1

1 2 3 4 5 6

A4(297X210)

