



MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL No.	SLP2130-P
MATERIAL	HEAD & BODY - DIE CAST AL BOLT,NUT & ETC. - SUS304, ROLLER - POM
CONATCT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP66
CABLE ENTRY	PF 1/2
COLIOR	MAKER STANDARD
INSULATION RESISTANCE	100MΩ MIN. at 500V DC

■ Operating Characteristics

OF max.g	2,850
RF min.g	810
PT	2.0mm
MD max.	0.5mm

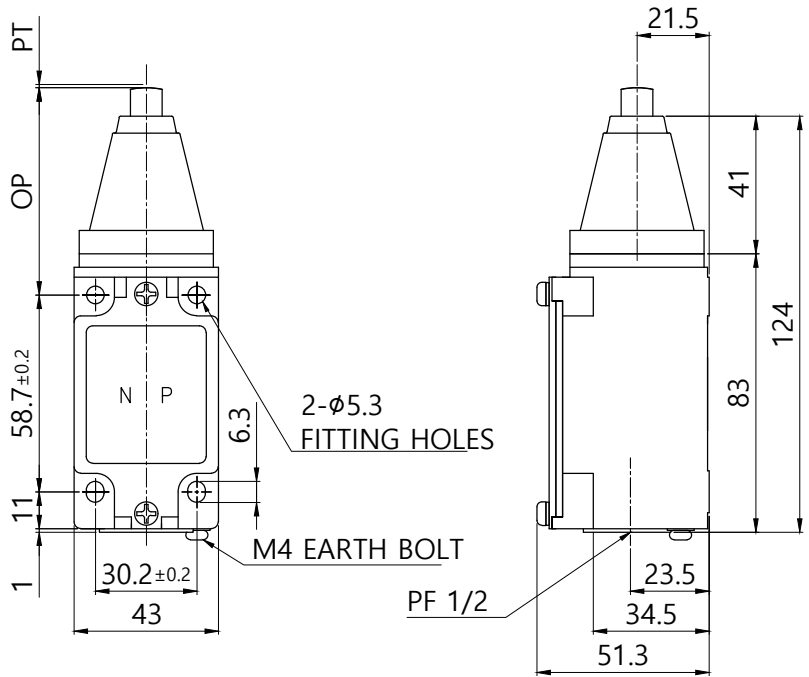

ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH	-		-		-	
FOR LINEAR DIMENSIONS	0.5-3	f	Ⓜ	c		v	Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY
	3-6	±0.05	±0.1	±0.2	—	DSND BY					
	6-30	±0.1	±0.2	±0.5	±1	U.H LEE	U.H LEE			VIEW 3	DATE 2012.01.27
	30-120	±0.15	±0.3	±0.8	±1.5	TITLE OUT-LINE DRAWING (SLP2130-P)			MODEL SLP2130-P		
	120-400	±0.2	±0.5	±1.2	±2.5				DWG. NO. SLP2130-P-OUT		
	400-1000	±0.3	±0.8	±2	±4				SCALE 1/1 SIZE A3 REV 00 SHEET 1/-		
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°						
	10-50	±0°30'		±1°	±2°						
	50-120	±0°20'		±0°30'	±1°						
	120-400	±0°10'		±0°13'	±0°30'						

Qlight