


MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

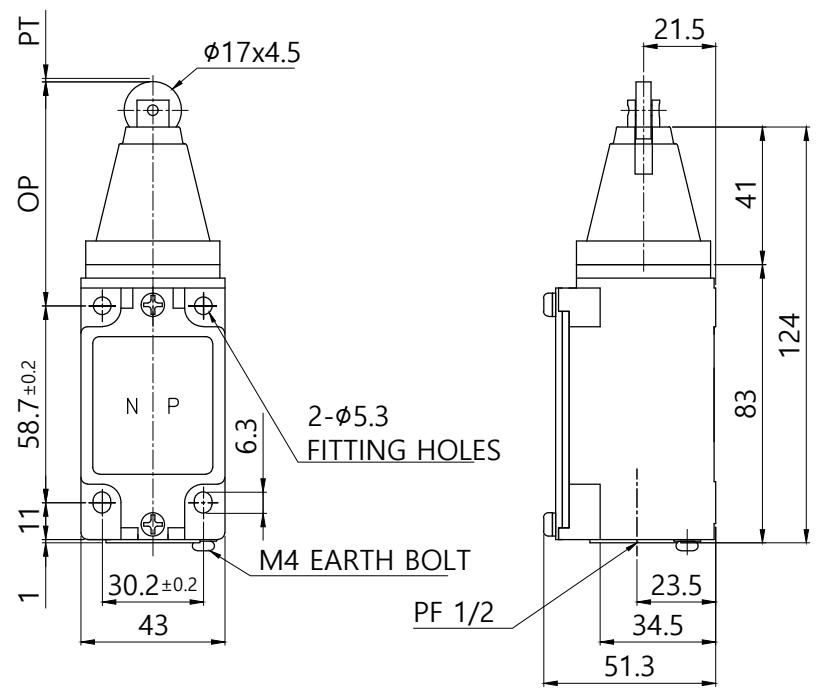

MODEL No.	SLP2130-RP
MATERIAL	HEAD & BODY - DIE CAST AL BOLT, NUT & ETC. - SUS304, ROLLER - POM
CONTACT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP66
CABLE ENTRY	PF 1/2
COLOR	MAKER STANDARD
INSULATION RESISTANCE	100M $\Omega$ MIN. at 500V DC

Operating Characteristics

OF max.g	2,850
RF min.g	810
PT	2.0mm
MD max.	0.5mm

ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH	-		-		-	
FOR LINEAR DIMENSIONS	0.5-3	f	Ⓜ	c	v	Nr.	DWG. NO.	TITLE/NAME	MAT'L	QTY	REFERENCE
	3-6	$\pm 0.05$	$\pm 0.1$	$\pm 0.2$	$\pm 0.5$	DSND BY	U.H.LEE	CHKD BY	APRV BY	VIEW	DATE
	6-30	$\pm 0.1$	$\pm 0.2$	$\pm 0.5$	$\pm 1$					3	2012.01.27
	30-120	$\pm 0.15$	$\pm 0.3$	$\pm 0.8$	$\pm 1.5$	TITLE OUT-LINE DRAWING (SLP2130-RP)			MODEL SLP2130-RP		
	120-400	$\pm 0.2$	$\pm 0.5$	$\pm 1.2$	$\pm 2.5$				DWG. NO. SLP2130-RP-OUT		
	400-1000	$\pm 0.3$	$\pm 0.8$	$\pm 2$	$\pm 4$				SCALE 1/1		
FOR ANGULAR DIMENSIONS	0-10	$\pm 1^\circ$		$\pm 1'30''$	$\pm 3'$				SIZE A3		
	10-50	$\pm 0'30''$		$\pm 1'$	$\pm 2'$				REV 00		
	50-120	$\pm 0'20''$		$\pm 0'30''$	$\pm 1'$				SHEET 1/-		
	120-400	$\pm 0'10''$		$\pm 0'13''$	$\pm 0'30''$						

