



| MARK | DATE | REVISION | REVISER | APP .BY |
|------|------|----------|---------|---------|
| △ | | | | |
| △ | | | | |
| △ | | | | |

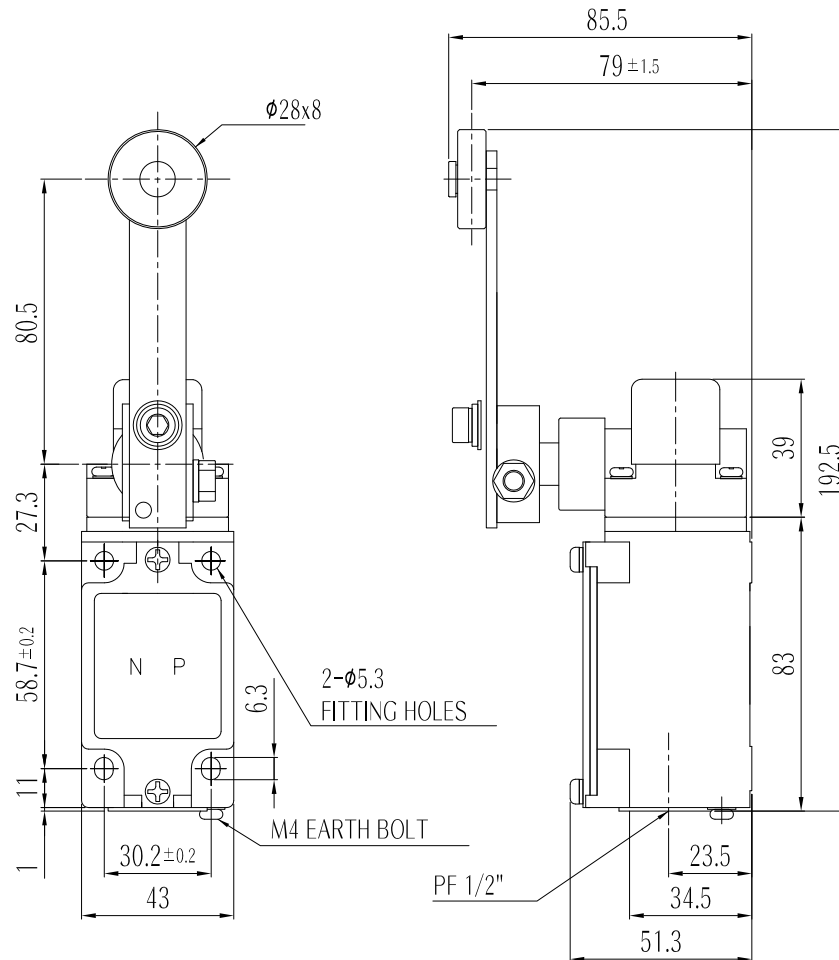

| | |
|-----------------------|--|
| MODEL No. | SW2TS-LRL |
| MATERIAL | HEAD & BODY - DIE CAST BRASS BOLT,NUT, ROLLER & ETC. - SUS304 |
| CONATCT | 2CKT-DB, 1A1B, 250VAC 6A |
| PROTECTION GRADE | WATER & DUST PROOF - IP66 |
| CABLE ENTRY | PF 1/2 |
| COLIOR | MAKER STANDARD |
| INSULATION RESISTANCE | 100MΩ MIN. at 500V DC |

■ Operating Characteristics

| | |
|----------|----------|
| OF max.g | 1,380 |
| RF min.g | 260 |
| PT | 25° ± 5° |
| MD max. | 10° |
| TT min | 70° |

| ISO2768-1 : CLASS OF TOLERANCE | | | | | SURFACE FINISH | - | | - | | - | | |
|--------------------------------|---------|--------|------|--------|----------------|---|---------|------------------------------|-------------|-----------------|------------|-----------|
| FOR LINEAR DIMENSIONS | 0.5~3 | ±0.05 | ±0.1 | c | | v | Nr. | DWG. NO. | TITLE/ NAME | MAT'L | QTY | REFERENCE |
| | 3~6 | | | ±0.2 | ±0.5 | DSND BY | CHKD BY | CHKD BY | APRV BY | VIEW | DATE | |
| | 6~30 | ±0.1 | ±0.2 | ±0.5 | ±1 | U.H LEE | U.H LEE | | | 3 | 2021.12.27 | |
| | 30~120 | ±0.15 | ±0.3 | ±0.8 | ±1.5 | TITLE | | OUT-LINE DRAWING (SW2TS-LRL) | | MODEL SW2TS-LRL | | |
| | 120~400 | ±0.2 | ±0.5 | ±1.2 | ±2.5 |  | | DWG. NO. | | SW2TS-LRL-OUT | | |
| 400~1000 | ±0.3 | ±0.8 | ±2 | ±4 | SCALE 1/1 | | | SIZE A3 | REV 00 | SHEET 1/1 | | |
| FOR ANGULAR DIMENSIONS | 0~10 | ±1° | | ±1°30' | ±3° | | | | | | | |
| | 10~50 | ±0°30' | | ±1° | ±2° | | | | | | | |
| | 50~120 | ±0°20' | | ±0°30' | ±1° | | | | | | | |
| | 120~400 | ±0°10' | | ±0°13' | ±0°30' | | | | | | | |