




1 2 3 4 5 6

MARK	DATE	REVISION	REVISER	APP.BY
△				
△				
△				

MODEL NO	SW2MS-RL
MATERIAL	HEAD & BODY - CASTING BRASS BOLT, NUT & ETC.-SUS304
CONTACT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF-IP67
CABLE ENTRY	PF3/4
COLOR	MAKER STANDARD
INSULATION RESISTANCE	100MΩ MIN. AT 500V DC

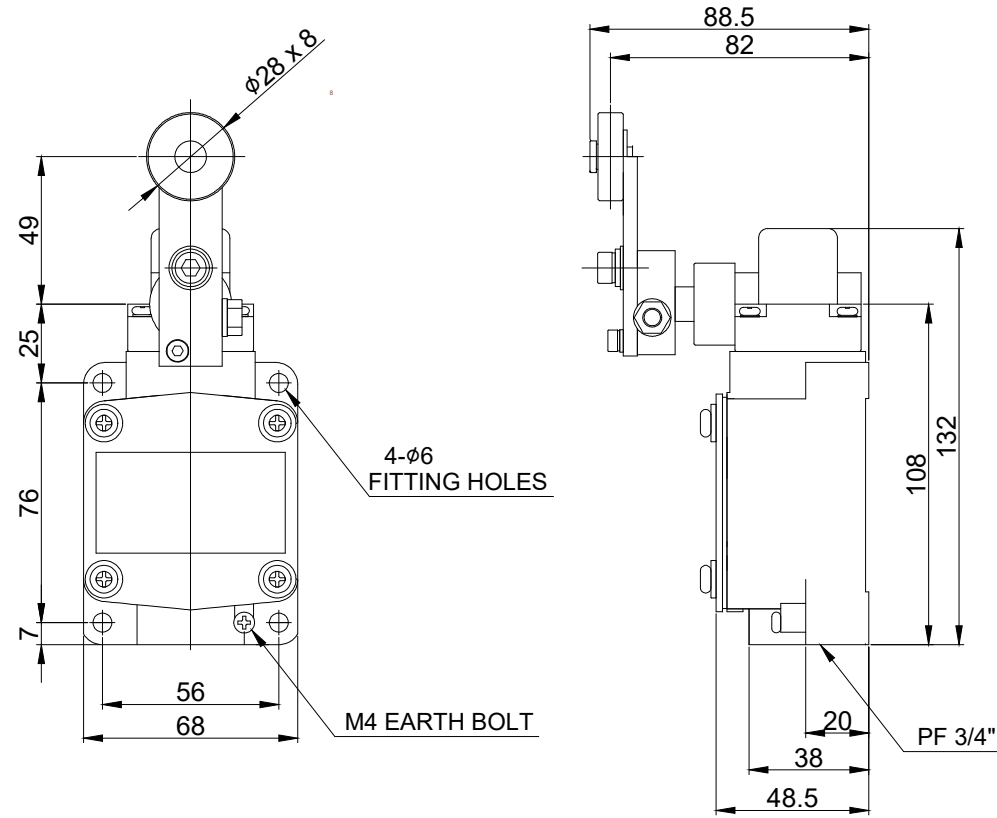

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-							
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QT'Y	REFERENCE
	3~6	±0.05	±0.1	±0.2	-		DSND BY J.K.HAN	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.I.BAE	VIEW 3	DATE 2020.11.20		
	6~30	±0.1	±0.2	±0.5	±1									
	30~120	±0.15	±0.3	±0.8	±1.5		TITLE SW2MS-RL OUTLINE DRWAING		MODEL SW2MS-RL					
	120~400	±0.2	±0.5	±1.2	±2.5					DWG. NO. SW2MS-RL-OUT				
	400~1000	±0.3	±0.8	±2	±4						SCALE N/S	SIZE A4	REV 00	SHEET 1/1
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°									
	10~50	±0°30'		±1°	±2°									
	50~120	±0°20'		±0°30'	±1°									
	120~400	±0°10'		±0°13'	±0°30'									

