



MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL No.	SLP5130-SW
MATERIAL	HEAD & BODY - DIE CAST AL BOLT,NUT & ETC. - SUS304
CONATCT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP66
CABLE ENTRY	STANDARD - NPT 1/2 OPTION - NPT 3/4
COLOR	MAKER STANDARD
INSULATION RESISTANCE	100MΩ MIN. at 500V DC

■ Operating Characteristics

OF max.g	150
PT	20mm ± 10mm
360° without direction	

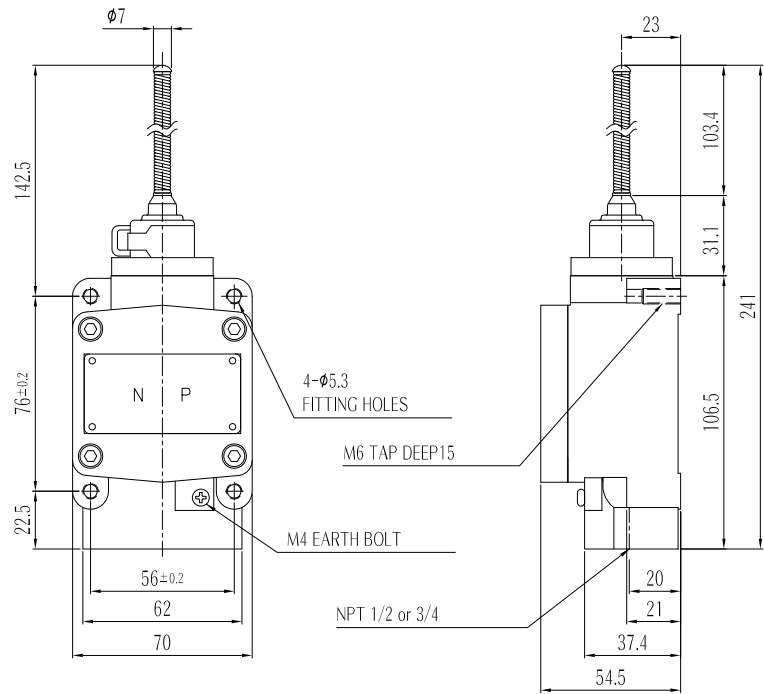

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-										
FOR LINEAR DIMENSIONS		f	m	c	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE					
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	MODEL	VIEW	DATE					
	3~6			±0.3	±0.5		S.H.KIM	J.H.PARK		J.K.HAN	3	2023.04.05					
	6~30	±0.1	±0.2	±0.5	±1												
	30~120	±0.15	±0.3	±0.8	±1.5												
	120~400	±0.2	±0.5	±1.2	±2.5												
	400~1000	±0.3	±0.8	±2	±4												
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°					DWG. NO.							
	10~50	±0°30'		±1°	±2°												
	50~120	±0°20'		±0°30'	±1°						SCALE	SIZE	REV	SHEET			
	120~400	±0°10'		±0°13'	±0°30'						1/1	A4	02	1/1			