MARK	DATE	REVISION	REVISER	APP .BY
1				J.K.HAN
2				
3				

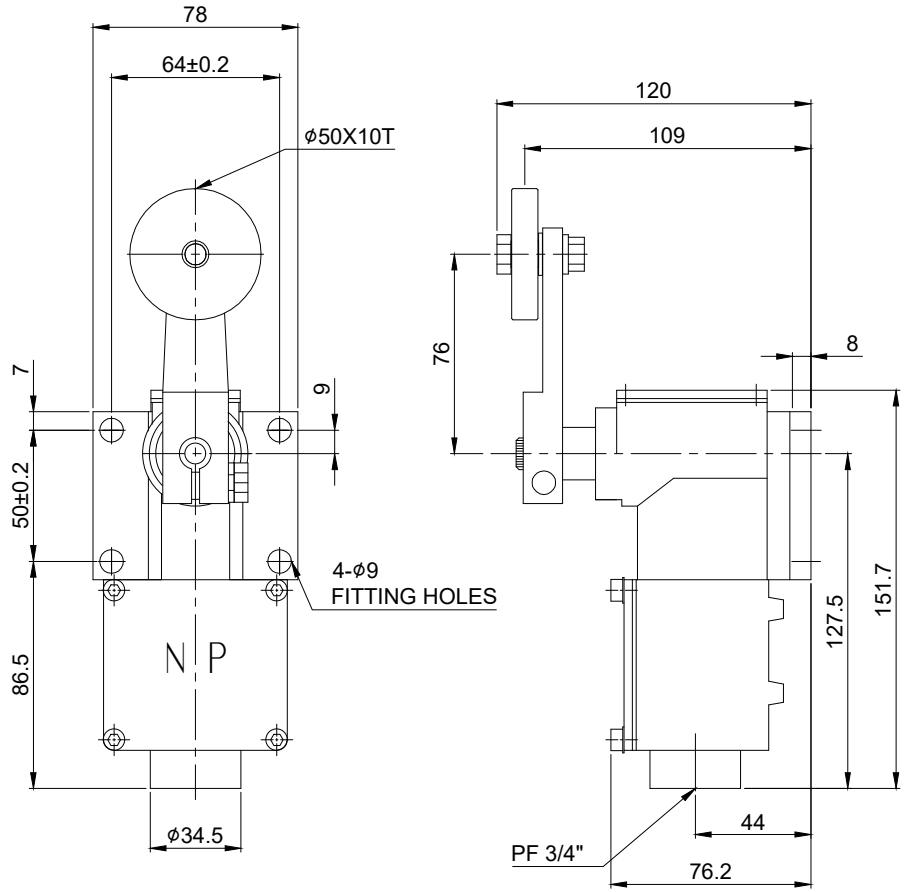

MODEL NO	SH8560-RL/ SH8560S-RL
MATERIAL	SH8560-RL: HEAD & BODY - DIE CAST AL
	SH8560S-RL: HEAD & BODY - DIE CAST BRASS
	BOLT,NUT,ROLLER,LEVER - SUS
CONATCT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP56
CABLE ENTRY	PF 3/4"
COLOR	MAKER STANDARD
INSULATION RESISTANCE	100㏁ MIN. at 500V DC

▣ Operating Characteristics

OF max.g	1,850
RF min.g	350
PT	25±5°
MD max.	10°
TT min.	70°

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
		f	m	ⓒ	v	
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
-					

DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
C.S.GWAK	J.H.PARK		J.K.HAN	3	2021.08.27

TITLE	SH8560/ SH8560S-RL OUTLINE DRWAING
MODEL	SH8560/ SH8560S-RL
DWG. NO.	SH8560/ SH8560S-RL-OUT

Qlight

SCALE	SIZE	REV	SHEET
1/1	A4	00	1/1

A4(297X210)