


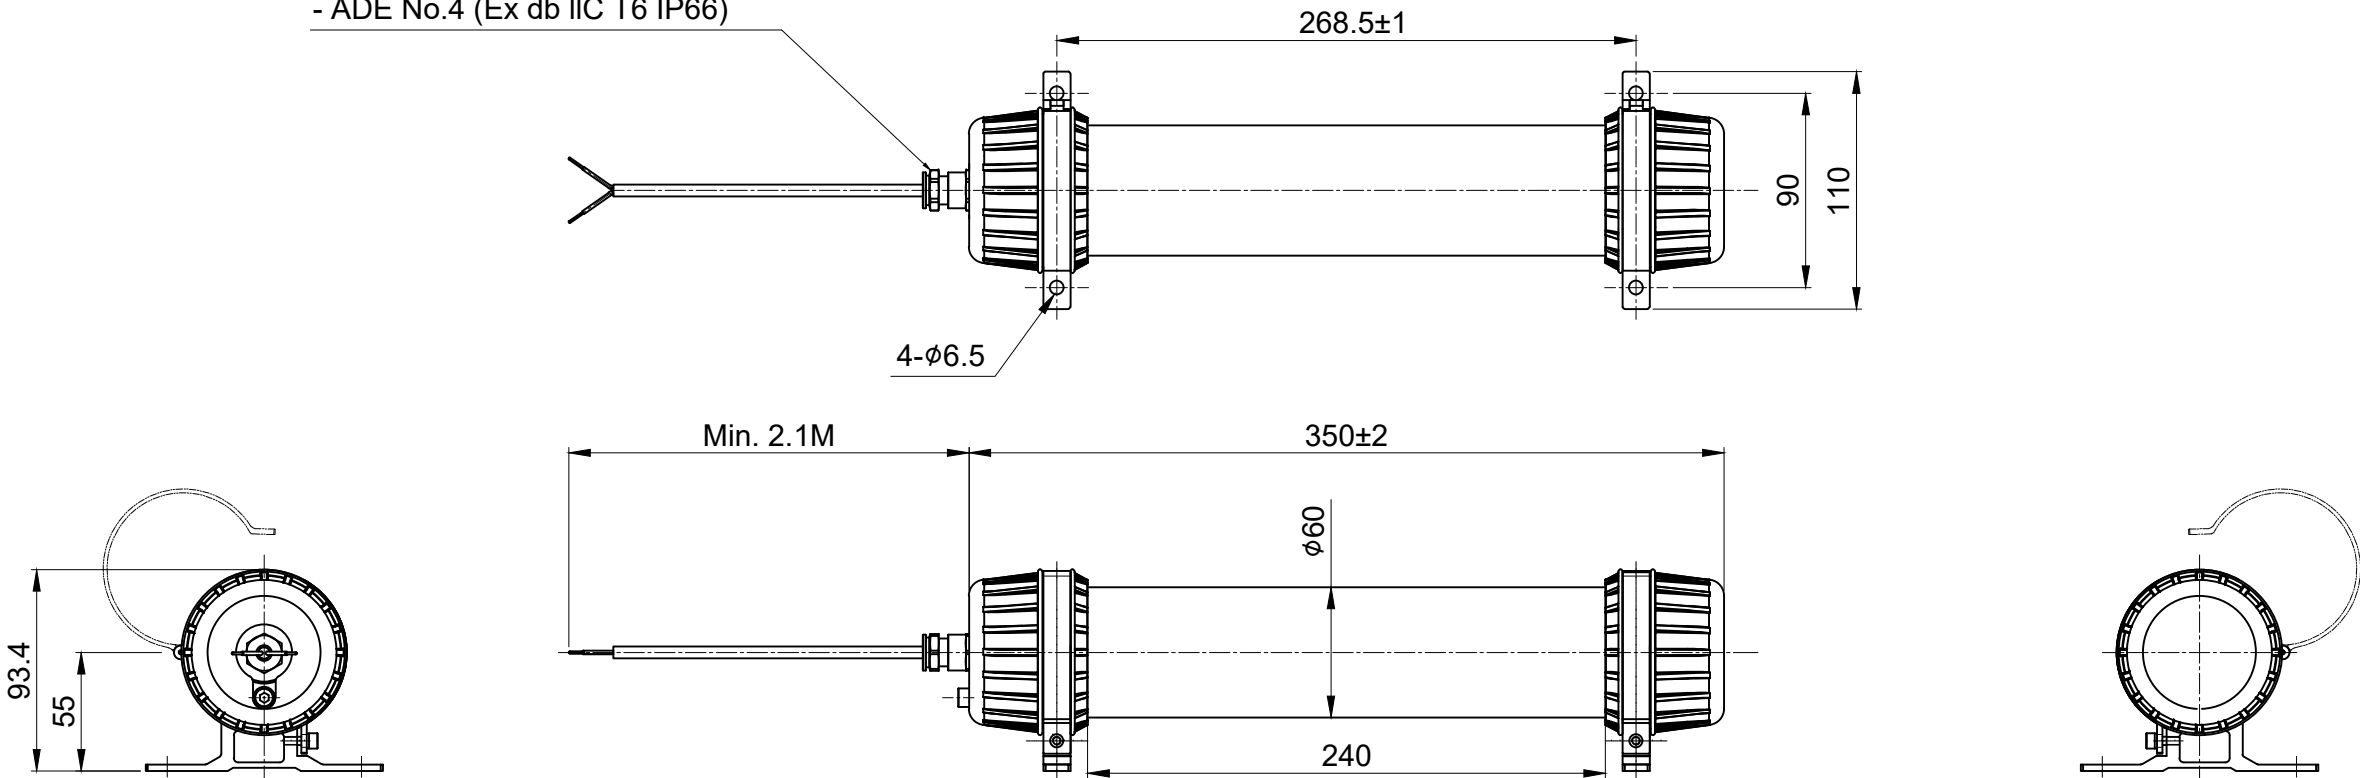

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QLEX-350(PL)-24	
MATERIAL		HOUSING (SIDE COVER) - AL	
		HOUSING (PACKING COVER OUT) - NBR	
		LENS (GLOBE) - PC	
COLOR OF LENS		CLEAR	
USE VOLT.	CURRENT	DC24V	MAX. 0.36A
PROTECTION GRADE		Ex d IIC T6 IP66/IP67	
CABLE GRNAD		M12xP1.5 ADE 1F2 (COOPER CAPRI No.4_SILICONE)	

CABLE GLAND SPECIFICATION

- Non Armoured Cable Gland
- Cooper Capri S.A.S
- Model : AED 1F2 (M12xP1.5-6g)
- ADE No.4 (Ex db IIC T6 IP66)



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
	3~6	±0.05	±0.1	±0.2	-	DSND BY J.Y. KIM	CHKD BY J.Y. KIM	CHKD BY 	APRV BY J.W. KIM	VIEW 3	DATE 2021.07.23	
	6~30			±0.3	±0.5							
	30~120	±0.1	±0.2	±0.5	±1							
	120~400	±0.15	±0.3	±0.8	±1.5							
	400~1000	±0.2	±0.5	±1.2	±2.5							
FOR ANGULAR DIMENSIONS	0~10	±0.3	±0.8	±2	±4	TITLE QLEX-350(PL) LAYOUT			MODEL QLEX SERISE			
	10~50	±1°		±1°30'	±3°				DWG. NO. QLEX LAYOUT			
	50~120	±0°30'		±1°								
	120~400	±0°20'		±0°30'								
	120~400	±0°10'		±0°13'	±0°30'							
									SCALE N/S	SIZE A4	REV 00	SHEET 1/1