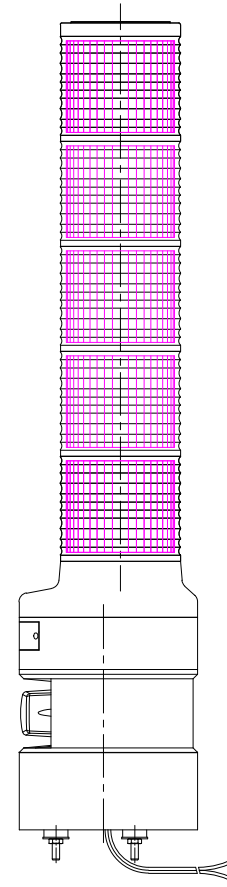
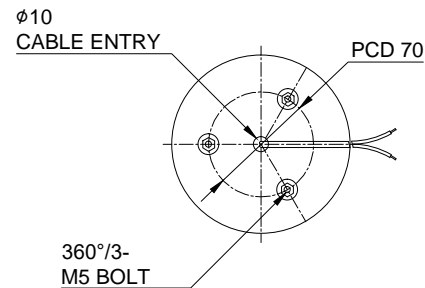


STNDL-N / STNDLF-N



LAYER	L
1	267
2	337
3	407
4	477
5	547



MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			STNDL-N / STNDLF-N			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHES. PER MIN			60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V	0.5W	0.450A/LAYER1	
			DC24V		0.285A/LAYER1	
			AC110V ~ AC220V		MAX. 0.165A/LAYER1	
KIND OF SOUND			WS	WARNING SOUNDS		
			WP	SPECIAL WARNING SOUNDS 1ST GR.		
			WM	MELODIES		
			WA	ALARMS		
			WO	SPECIAL WARNING SOUNDS 2ND GR.		
			WN	SPECIAL WARNING SOUNDS 3RD GR.		
			SD CARD - MP3			
VOLUME			MAX. 105dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP54			
CABLE ENTRY			ø10 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY / FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	(C)	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH	-		-		-		1		-		
	Nr.	DWG. NO.	TITLE/ NAME			MAT'L		QTY	REFERENCE		
	DSND BY H.M.SEO		CHKD BY J.Y.KIM		CHKD BY 		APRV BY J.W.KIM		VIEW 3	DATE 2022.12.23	
	TITLE STNDL-N / STNDLF-N OUTLINE DRAWING					MODEL STNDL-N / STNDLF-N					
						DWG. NO. STNDL-N / STNDLF-N_OUT					
						SCALE N/S		SIZE A4	REV 00	SHEET 1/1	

A4(297X210)