


MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO		QNHS		
MATERIAL		HOUSING-AL		
		HORN-PC		
USE VOLT.	CURRENT	QNHS	DC12~24V	MAX. 24W
			AC110~230V	MAX. 53W
		QNHS-H	DC12~24V	MAX. 41W
			AC110~230V	MAX. 76W
FLASHING PER MIN		FLASHING - 60~80		
		LED STROBE - 70~80		
		LED ROTATE - 60~80		
KIND OF SOUND		WS	5 Warning Sounds	
		WP	5 Special Warning Sounds	
		WM	5 Melodies	
		WA	5 Alarms	
		WV	5 Customizable Sounds	
VOLUME		QNHS	MAX. 118dB	
		QNHS-H	MAX. 123dB	
PROTECTION GRADE		WATER & DUST PROOF IP66		
CABLE ENTRY		1/2" NPT		
COLOR OF HOUSING		MAKER STANDARD		
ACTION		LED STEADY / FLASHING / STROBE / ROTATE		

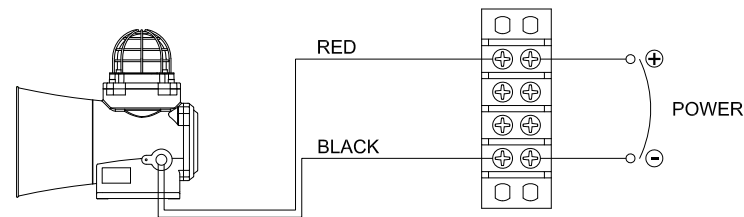

INSIDE 4P TERMINAL BLOCK
ELECTRICAL CONNECTION DIAGRAM

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.2	±0.5	±0.8	±1.5
	400~1000	±0.3	±0.8	±1.2	±2.5
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±2°	±4°
	10~50	±0°30'	±1°	±1°30'	±3°
	50~120	±0°20'	±1°	±2°	±2°
	120~400	±0°10'	±1°	±1°30'	±1°
	120~400	±0°10'	±0°13'	±0°30'	±0°30'

SURFACE FINISH		-	-	-	1	-
Nr.	DWG. NO.	TITLE / NAME		MAT'L	QT'Y	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
Y.H.JOO	J.Y.KIM	J.K.HAN	J.I.BAE	3	2023.11.27	
TITLE				MODEL		
QNHS_OUTLINE DRAWING				QNHS Series		
				DWG. NO.		
				QNHS_OUT		
SCALE		SIZE	REV	SHEET		
N/S		A4	00	1/1		