
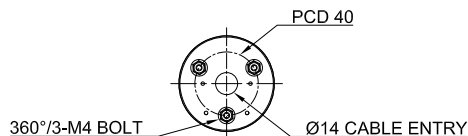


STG60ML : DC
STG60MLF : DC
STG60ML-BZ : DC

STG60MLF-BZ : DC

STG60ML : AC
STG60MLF : AC
STG60ML-BZ : AC
STG60MLF-BZ : AC

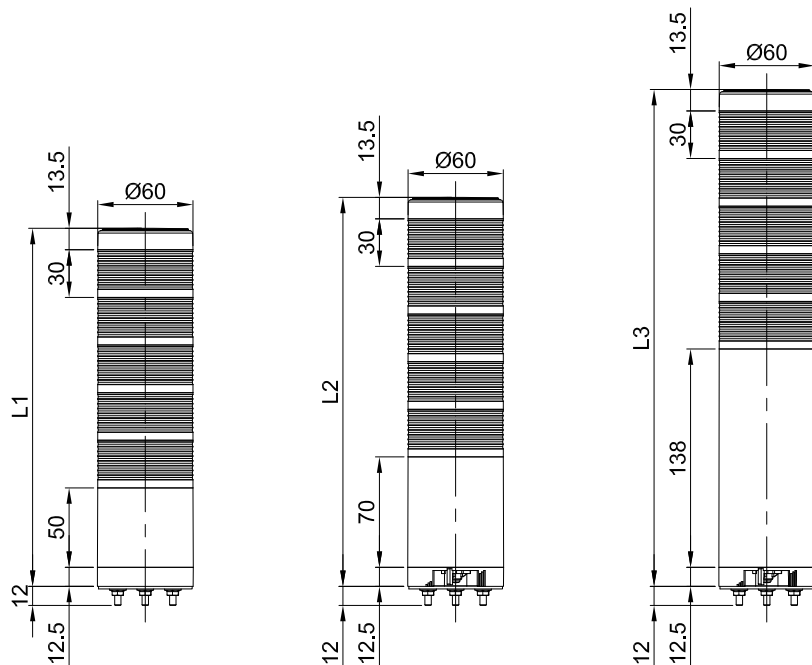

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			STG60L/ L-BZ/ STG60LF/ LF-BZ				
MATERIAL			HOUSING-ABS				
			LENS-AS				
			PIPE-AL				
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()				
FLASHES. PER MIN			60 ~ 80				
USE VOLT.	LED	CURRNET	AC/DC12V	0.5W	0.085A/LAYER1		
			AC/DC24V		0.060A/LAYER1		
			AC110V ~ AC220V		MAX. 0.050A/LAYER1		
VOLUME			MAX. 85dB at 1m				
PROTECTION GRADE			WATER & DUST PROOF IP65 (BZ TYPE-IP54)				
CABLE ENTRY			ø9.5 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED STEADY / FLASHING LIGHT				

LAYER	L1	L2	L3
1	106	126	194
2	136	156	224
3	166	186	254
4	196	216	284
5	226	246	314

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	⊙	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.15	±0.3	±0.8	±1.5
FOR ANGULAR DIMENSIONS	120~400	±0.2	±0.5	±1.2	±2.5
	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°	±1°30'	±1°	±3°
	10~50	±0°30'	±1°	±1°	±2°
	50~120	±0°20'	±0°30'	±1°	±1°
	120~400	±0°10'	±0°13'	±0°30'	±0°30'

SURFACE FINISH		-		1	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QT'Y
DSND BY	CHKD BY	CHKD BY		APRV BY	VIEW
Y.H.JOO				J.K.HAN	3
DATE		2024.10.24		REFERENCE	
TITLE		STG60ML SERIES OUTLINE DRAWING		MODEL	
				STG60ML SERIES	
				DWG. NO.	
				STG60ML SERIES-OUT	
				SCALE	
				N/S	
				SIZE	
				A4	
				REV	
				00	
				SHEET	
				1/1	

Qlight