


MARK	DATE	REVISION	REVISER	APP. BY
△				
△				
△				

Model	L1	L2
QDML-IOL-125	115	125
QDML-IOL-250	240	250
QDML-IOL-480	466	480
QDML-IOL-700	686	700
QDML-IOL-910	896	910

MODEL NO	QDML-IOL
MATERIAL	HOUSING-AL LENS-PU
COLOR OF LENS	TRANSPARENT
COLOR OF LIGHT	RED, GREEN, YELLOW, BLUE, WHITE, ORANGE, PINK, USE-DEFINED(IO-LINK)
USE VOLT.	DC24V
PROTECTION GRADE	WATER & DUST PROOF IP67
COLOR OF HOUSING	MAKER STANDARD
CONNECTION	CONNECTOR, M12, 5-pin
ACTION	STATIC, BLINKING, FLASHING

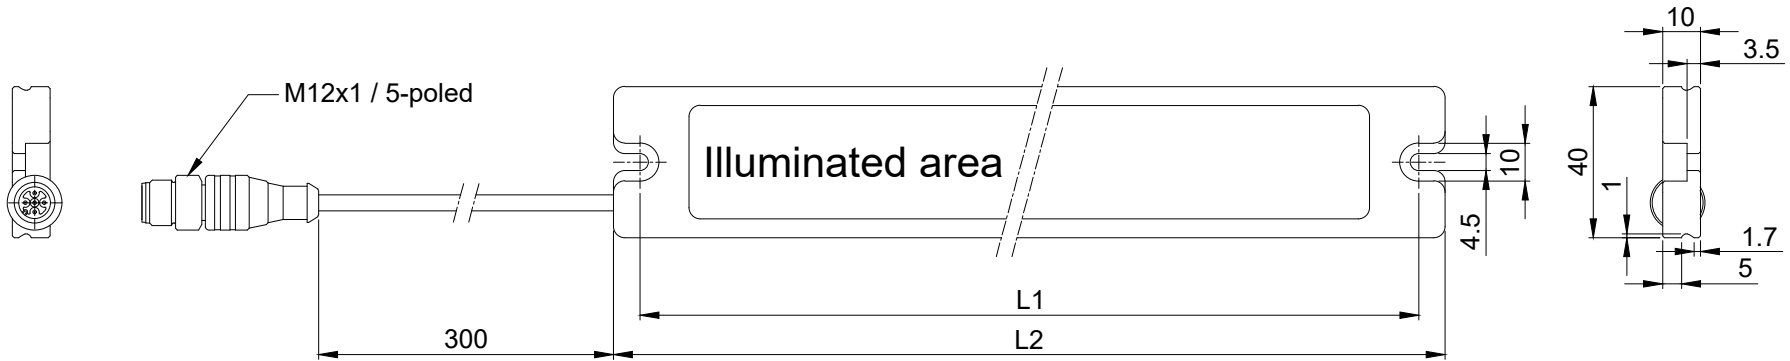

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	c	Ⓥ		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		J.I.BAE	J.Y.KIM		J.K.HAN	3	2024.9.26
	6~30	±0.1	±0.2	±0.5	±1		TITLE QDML-IOL OUTLINE DRAWING			MODEL QDML-IOL		
	30~120	±0.15	±0.3	±0.8	±1.5		Qlight			DWG. NO. QDML-IOL_OUT		
	120~400	±0.2	±0.5	±1.2	±2.5					SCALE N/S		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4					SIZE A4		
	0~10	±1°		±1°30'	±3°					REV 00		
	10~50	±0°30'		±1°	±2°					SHEET 1/1		
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							