

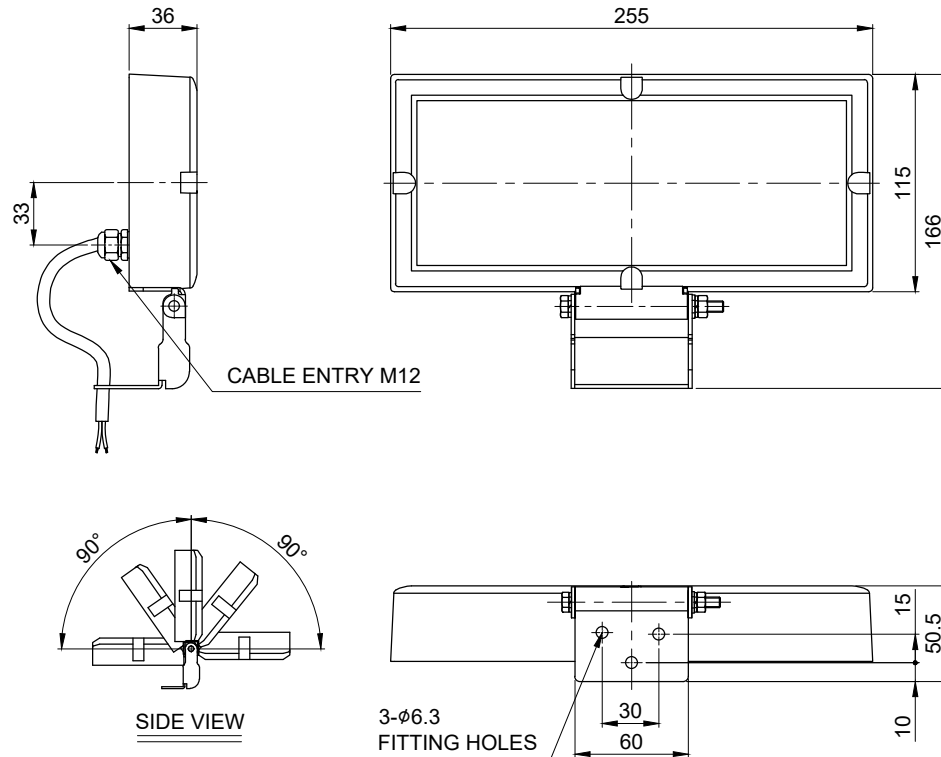
1 2 3 4 5 6

A

B

C



D



※ POWER CABLE : Dura & Flex-F VU(0.5sq X 2C) 450mm

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO		QML-250-K		
MATERIAL		BODY-AL		
		LENS-TEMPERED GLASS		
		COVER-AL		
		BRACKET-AL		
COLOR OF LENS		TRANSLUCENT		
USE VOLT.	LED	POWER CONSUMPTION	DC24V	CHIP LED 30W
PROTECTION GRADE		WATER & DUST PROOF IP67 / IP69K		
CABLE ENTRY		M12		

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
	400~1000	±0.3	±0.8	±2	±4							
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QML-250-K_OUT			
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
									SCALE N/S		SIZE A4	REV 00

1 2 3 4 5 6 A4(297X210)