




1 2 3 4 5 6

A

B


C

D

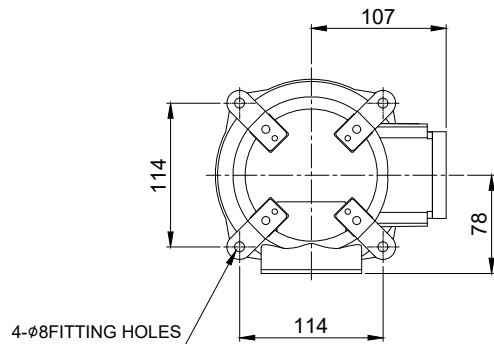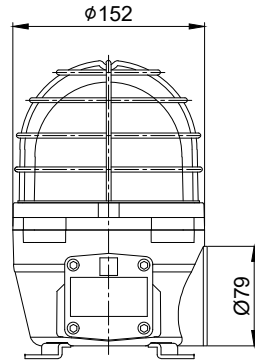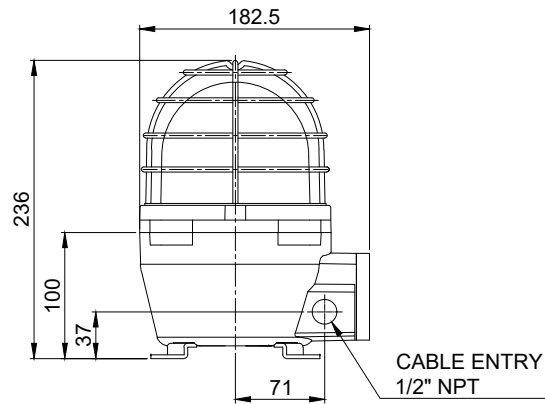

MARK	DATE	REVISION	REVISER	APP. BY
△				
△				
△				

MODEL NO		QEAL1	
MATERIAL		HOUSING-AL	
		LENS-TEMPERED CLASS	
		PROTECTION CAGE-SUS	
LIGHT SOURCE		LOW INTENSITY B TYPE	
LIGHT COLOR		RED	
Max. POWER	VOLTAGE	Max. 26.7W	DC12V
			DC24V
			AC110V ~ AC220V
LUMINOUS INTENSITY	42 ± 2cd		
PROTECTION GRADE		WATER & DUST PROOF IP66	
CABLE ENTRY		1/2" NPT	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED STEADY LIGHT	

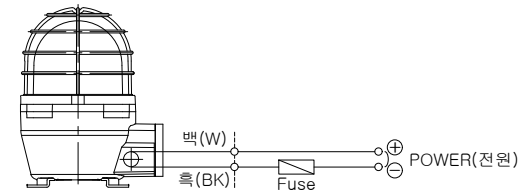

ELECTRICAL CONNECTION DIAGRAM

-	-	-	-	1	-
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK	J.K.HAN	J.K.HAN	3	2016.08.30
TITLE			MODEL		
QEAL1 OUTLINE DRAWING			QEAL1		
			DWG. NO.		
			QEAL1_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

1 2 3 4 5 6

A4(297X210)