



STC80L : AC/DC
STC80LF : AC/DC
STC80L-BZ : DC/AC
STC80LF-BZ : DC

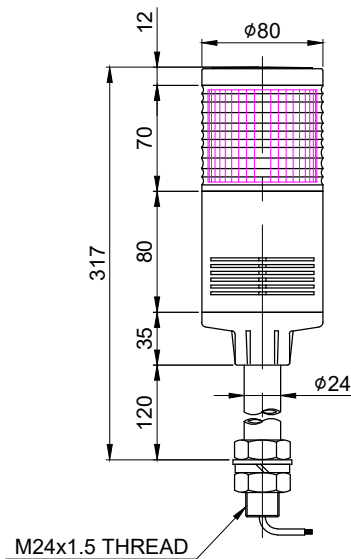

STC80LF-BZ : AC

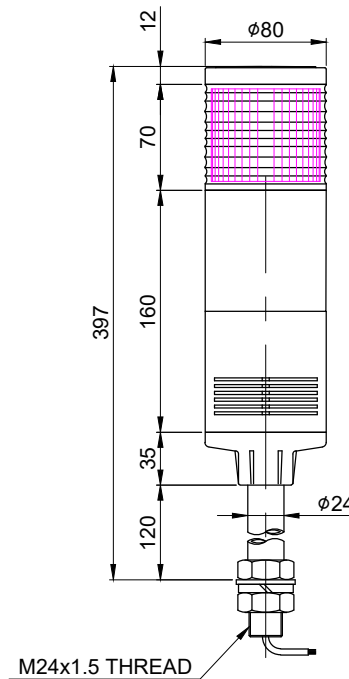

MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			STC80L			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			POLE-AL			
COLOR OF LENS			CLEAR			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	0.275A	
			DC24V		0.235A	
			AC110V		0.130A	
			AC220V		0.085A	
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø20 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			MULTIPLE COLORS LED SIGNAL STEADY/ FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	6~30	±0.1	±0.2	±0.5	±1			TITLE STC80L OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5			MODEL STC80L					
	120~400	±0.2	±0.5	±1.2	±2.5			DWG. NO. STC80L_OUT					
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			SCALE N/S					
	0~10	±1°		±1°30'		±3°		SIZE A4					
	10~50	±0°30'		±1°		±2°		REV 00					
	50~120	±0°20'		±0°30'		±1°		SHEET 1/1					
	120~400	±0°10'		±0°13'		±0°30'							

Qlight