




MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		PSSANA700		
MATERIAL		HON HOUSING-PC		
		SOLENOID VALVE BOX-ABS		
USE VOLT.	CURRENT	DC24V	MAX. 0.448A	
		AC110V	MAX. 0.111A	
		AC220V	MAX. 0.055A	
VOLUME		MAX. 130dB at 1m		
PROTECTION GRADE		WATER & DUST PROOF IP56		
CABLE ENTRY		φ27 CABLE		
COLOR OF HOUSING		RED, BLACK, MUNSELL NO.75BG 7/2		
OPERATING AIR PRESSURE		5~7kg/cm²		

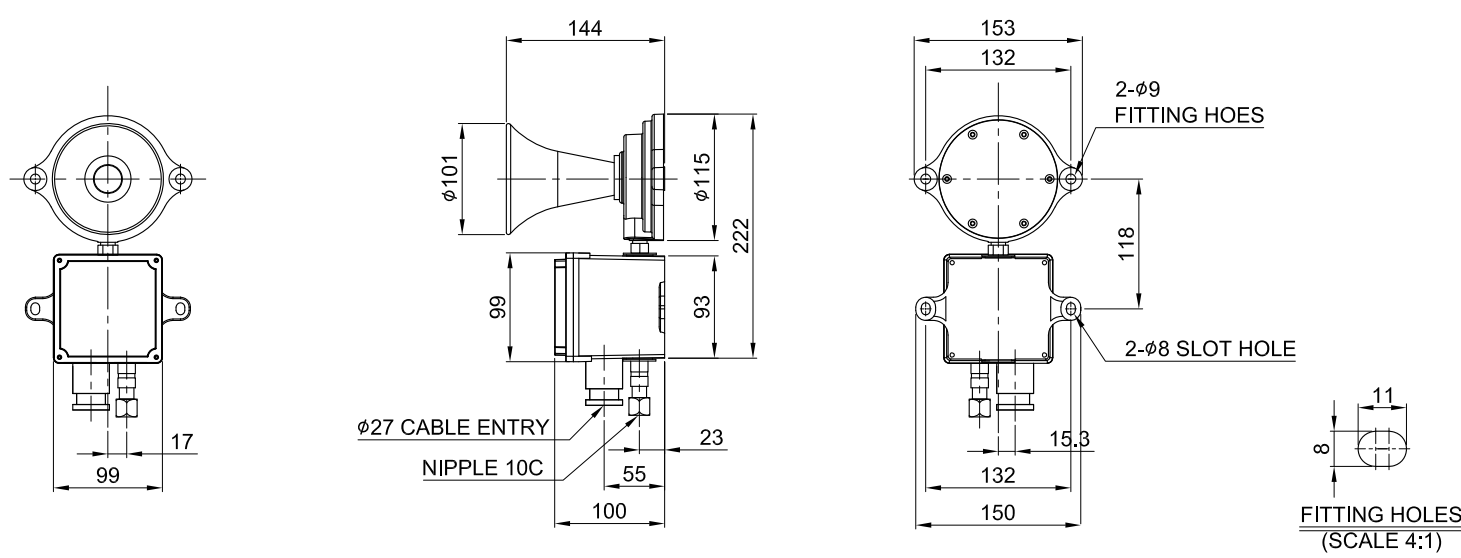

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS	0.5~3	f ±0.05	m ±0.1	Ⓢ ±0.2	v -		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
	3~6			±0.3	±0.5		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	6~30	±0.1	±0.2	±0.5	±1		J.H.PARK	J.H.PARK		J.K.HAN	3	2017.11.16
	30~120	±0.15	±0.3	±0.8	±1.5		TITLE			PSSANA700 OUTLINE DRAWING		
	120~400	±0.2	±0.5	±1.2	±2.5					MODEL PSSANA700		
	400~1000	±0.3	±0.8	±2	±4					DWG. NO. PSSANA700_OUT		
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	SCALE N/S		SIZE A4	REV 00	SHEET 1/1		
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

