

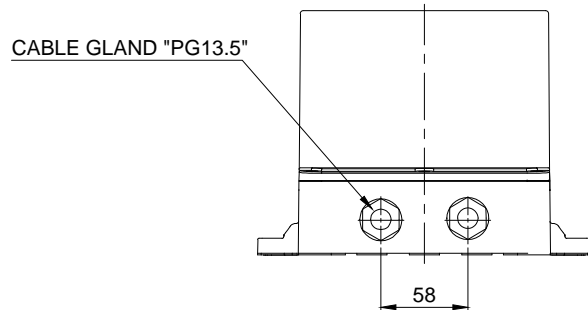
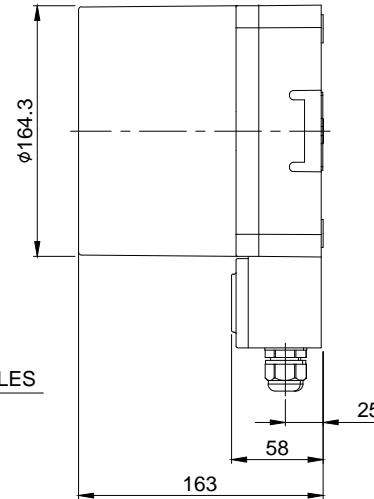


MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QWCD50T			
MATERIAL		HORN-PC			
		HOUSING-PC+ABS			
		-			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE()			
USE VOLT.	CURRENT	STANDARD	DC12V ~ 24V	0.2W	MAX. 5.450A
			AC110V ~ 220V		MAX. 0.900A
		SD CARD TYPE	DC12V ~ 24V		MAX. 3.800A
			AC110V ~ 220V		MAX. 0.720A
CHANNEL		BIT INPUT		5CH(ONLY SD-CARD)	
		BINARY INPUT		31CH	
KIND OF SOUND	VOLUME	WARNING SOUNDS 31Ch		MAX. 123dB at 1m	
		MP3 SOUNDS		MAX. 118dB at 1m	
PROTECTION GRADE		WATER & DUST PROOF - IP66			
CABLE ENTRY		CABLE GLAND "PG13.5" x 2			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED LAMP STROBE LIGHT			

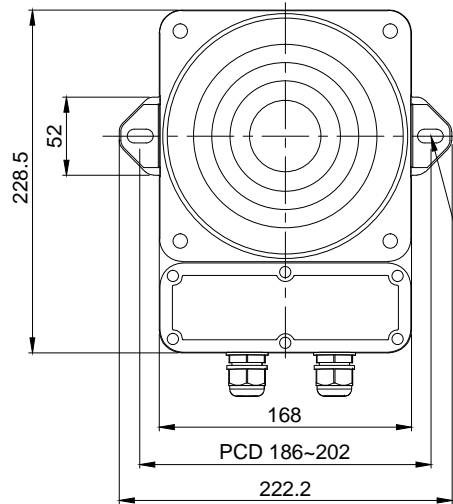

FITTING HOLES

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH					
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY C.S.GWAK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN
	3~6			±0.3	±0.5						
	6~30	±0.1	±0.2	±0.5	±1			TITLE QWCD50T OUTLINE DRAWING	MODEL QWCD50T	DWG. NO. QWCD50T_OUT	SCALE 1/1
	30~120	±0.15	±0.3	±0.8	±1.5						
	120~400	±0.2	±0.5	±1.2	±2.5						
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			Qlight	SIZE A4	REV 01	SHEET 1/1
	0~10	±1°		±1°30'	±3°						
	10~50	±0°30'		±1°	±2°						
	50~120	±0°20'		±0°30'	±1°						
	120~400	±0°10'		±0°13'	±0°30'						

A4(297X210)