


CABLE ENTRY 1/2" NPT

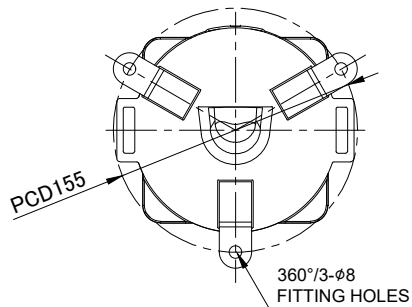

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO	QNES-PSG			
MATERIAL	HOUSING-AL			
	LENS-TEMPERED GLASS			
	PROTECTION CAGE-SUS316L			
COLOR OF LENS	RED( ), AMBER( ), GREEN( ), BLUE( )			
FLASHING PER MIN.	FLASHING - 60~80			
	LED STROBE - 70~80			
	LED ROTATE - 60~80			
USE VOLT.	LED	CURRENT	DC12~24V	MAX. 1.872A
			AC110~230V	MAX. 0.301A
VOLUME	MAX. 110dB			
PROTECTION GRADE	WATER & DUST PROOF IP66			
CABLE ENTRY	1/2" NPT			
COLOR OF HOUSING	RED			
ACTION	LED STEADY / FLASHING / STROBE / ROTATE			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		Y.H.JOO			J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4		TITLE QNES-PSG OUTLINE DRAWING			MODEL QNES-PSG		
	0~10	±1°	±1°30'	±3°			Qlight			DWG. NO. QNES-PSG_OUT		
	10~50	±0°30'	±1°	±2°						SCALE	SIZE	REV
	50~120	±0°20'	±0°30'	±1°						N/S	A4	00
	120~400	±0°10'	±0°13'	±0°30'								SHEET 1/1