


MARK	DATE	REVISION	REVISER	APP. BY
△				
△				
△				

MODEL NO		SPK-N		
MATERIAL		HOUSING-ABS		
		COVER-ABS		
USE VOLT.	CURRENT	DC12V	250mA	
		DC24V	130mA	
		AC110V	65mA	
		AC220V	45mA	
VOLUME		MAX. 90dB at 1m		
PROTECTION GRADE		WATER & DUST PROOF IP23		
CABLE ENTRY		TERMINAL		
COLOR		MAKER STANDARD		

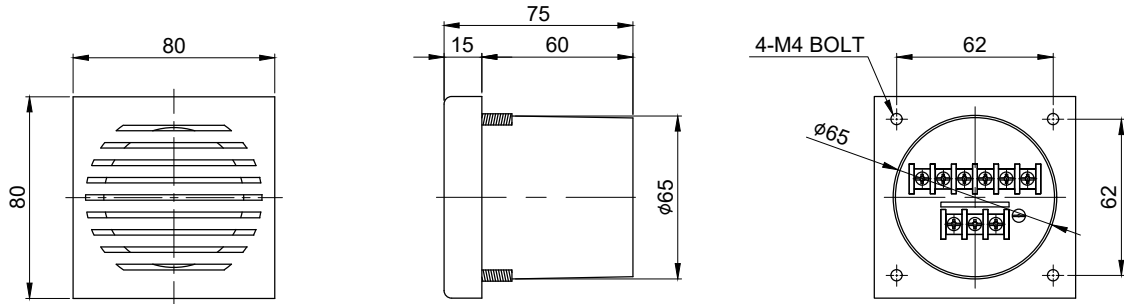

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	1	-
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2022.01.12
TITLE			MODEL		
SPK-N OUTLINE DRAWING			SPK-N		
DWG. NO.			SPK-N_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	01	1/1		