# Warning/Signal Light Mounting Brackets
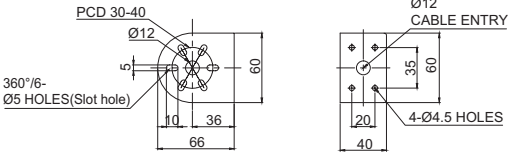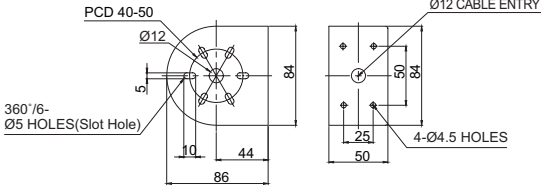
User can select from a variety of bracket options depending on their application conditions.

Units: mm

### · TWS45 | TWS80

Bracket options for direct mount warning/ signal light installation.
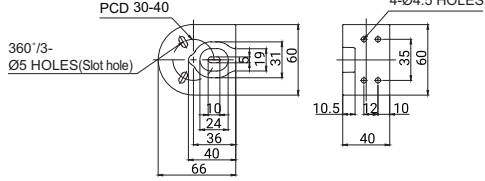Material: Steel
Color: Silver, Ivory

| Product Image | Technical Diagram for Applicable Models |
|---|---|
|  TWS45 | S50 Series, S60 Series, MFL60, QMCL60, Q60L |
|  TWS80 | S80 Series, S80SOL, MFL80, SMCL80, QMCL80, Q80L |

### · TWA45 | TWA80

Bracket options for direct mount warning/ signal light installation.
Bracket structure allows for contained and tidy wiring with no exposed wires.

Material: PC
Color: Black, Ivory

| Product Image | Technical Diagram for Applicable Models |
|---|---|
|  TWA45 | S50 Series, S60 Series, MFL60, QMCL60, Q60L |
|  TWA80 | S80 Series, S80SOL, MFL80, SMCL80, QMCL80, Q80L |

# Warning/Signal Light Mounting Brackets

Units: mm

| Product Image | Technical Diagram for Applicable Models |
|---|---|

## · SWP125

Bracket options for direct mount warning/signal light installation.
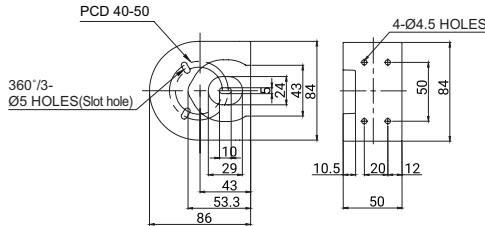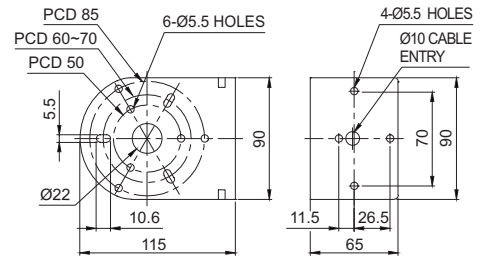
Material: Steel
Color: Silver, Ivory



SWP125 — S100 Series, S125 Series, STD Series, STND Series, STND100 / STND125 Series, QMCL100 / QMCL125, Q100L, Q125L

Diagram labels: PCD 85, PCD 60~70, PCD 50, 6-Ø5.5 HOLES, 4-Ø5.5 HOLES, Ø10 CABLE ENTRY, 5.5, 90, 70, 90, Ø22, 10.6, 11.5, 26.5, 115, 65

## · SWM125

Bracket options for direct mount warning/signal light installation Bracket structure allows for contained and tidy wiring with no exposed wires.

Material: PC
Color: Ivory
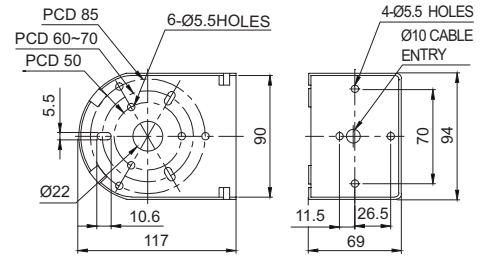


SWM125 — S100 Series, S125 Series, STD Series, STND Series, STND100 / STND125 Series, QMCL100 / QMCL125, Q100L, Q125L

Diagram labels: PCD 85, PCD 60~70, PCD 50, 6-Ø5.5HOLES, 4-Ø5.5 HOLES, Ø10 CABLE ENTRY, 5.5, 90, 70, 94, Ø22, 10.6, 11.5, 26.5, 117, 69

※ For detailed specifications of the pole type mounting bracket for the Q Series, SJ Series, SR Series, S80 Series, and MFL Series, please visit our website. Please refer to the [Tower Light Mounting Bracket] in this catalog.