


STG50L : DC  
STG50LF : DC  
STG50L-BZ : DC

STG50LF-BZ : DC

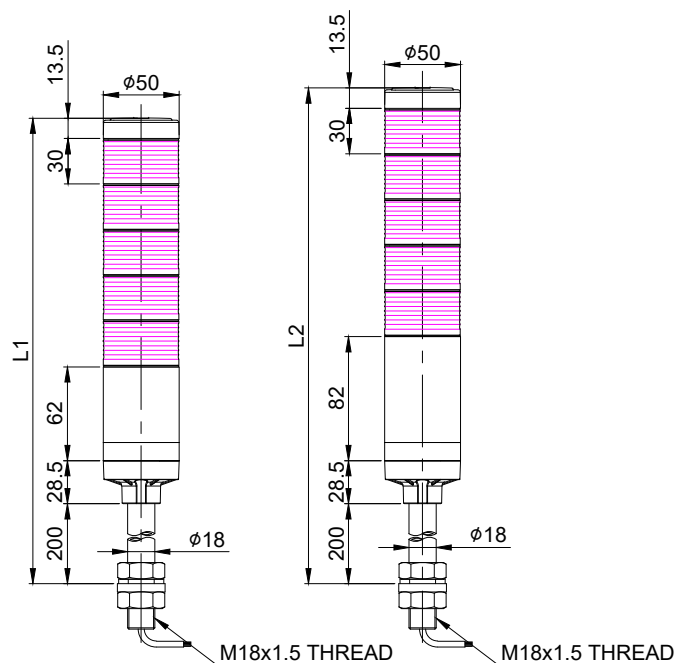

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			STG50L/ L-BZ/ STG50LF/ LF-BZ			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			PIPE-AL			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )			
FLASHES. PER MIN			60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V	0.5W	0.055A/LAYER1	
			DC24V		0.050A/LAYER1	
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP65 (BZ TYPE-IP54)			
CABLE ENTRY			ø9.5 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY / FLASHING LIGHT			

LAYER	L1	L2
1	334	354
2	364	384
3	394	414
4	424	444
5	454	474

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1		TITLE			MODEL		
	30~120	±0.15	±0.3	±0.8	±1.5		STG50L SERIES OUTLINE DRAWING			STG50L SERIES		
	120~400	±0.2	±0.5	±1.2	±2.5					DWG. NO.		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4					STG50L SERIES-OUT		
	0~10	±1°		±1°30'	±3°		SCALE			SIZE	REV	SHEET
	10~50	±0°30'		±1°	±2°		N/S			A4	00	1/1
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							