

Signal phone for multi-channel panel

CPK-IO



PRODUCT SPECIFICATION

CPK-IO

Materials ABS

Ambient operating temperature -25°C to +50°C

Protection rating IP65

Volume Max.85dB at 1m

Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio chords using IO input
- Compatible with NPN and PNP depending on the connection method by using the terminal block for connection on the back of the product
- Plays 255ea of MP3 files with binary input method
- Save MP3 sound source using USB C-TYPE cable



CPK-IO

CPK-IO Signal phone for multi-channel panel

Model number	Sound type	Volume	Voltage	Current	Certificates	Weight
CPK-IO	MP3 File (255 Sounds)	Max.85dB	DC12V-24V	Max. 600mA	CE	0.21kg

※ DC type model has a free-voltage range of 10V-36V


※ When playing MP3 files, there may be difference of volume depending on user's audio file type.



Terminal box for Signal phone panel(back side)


Technical Diagram

Units: mm

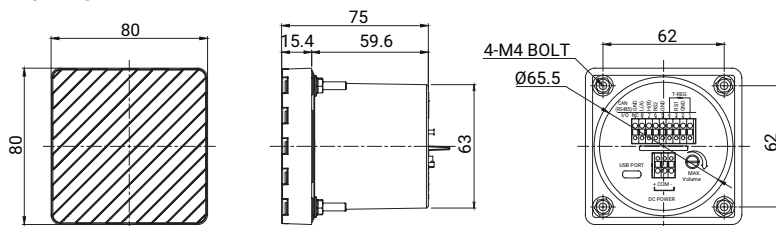


Wiring Instructions

CPK-IO "-" External Contact

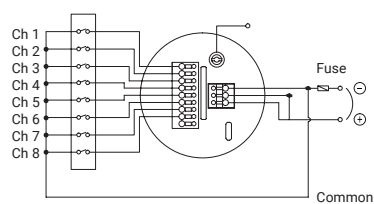


CPK-IO "+" External Contact

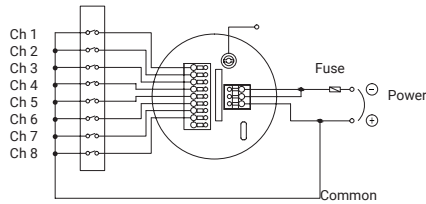


External transistor

NPN-TRANSISTOR

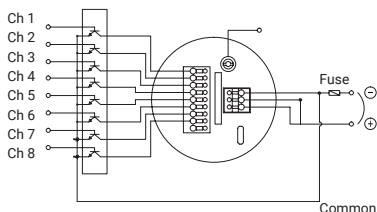

PNP-TRANSISTOR

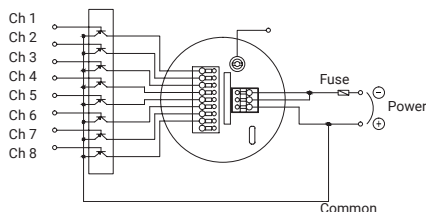

Ordering Specification

CPK-IO	-	12/24
[Model number]		[Voltage]
CPK-IO		12/24-DC12V-24V