

CPK-RS485



CPK-RS485

PRODUCT SPECIFICATION

CPK-RS485

Materials ABS
Ambient operating temperature -25°C to +50°C
Volume Max.90dB at 1m
Protection rating IP65
Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial RS485 communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using RS485 communication
- Save MP3 sound source using USB C-TYPE cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Supports 4 communication speeds: 9600bps, 19200bps, 38400bps, 115200bps

CPK-RS485 Signal phone for RS485 communication, Max.90dB

Model number	Sound type	Volume	Voltage	Current	Certificates	Weight
CPK-RS485	MP3 File (255 Sounds)	Max.90dB	DC12V-24V	Max. 600mA	CE	0.21kg

※ DC type model has a free-voltage range of 10V-36V


※ When playing MP3 files, there may be difference of volume depending on user's audio file type.



Terminal box for wiring of power and RS485 communication cable(back side)


Technical Diagram ·CPK-RS485

Units: mm

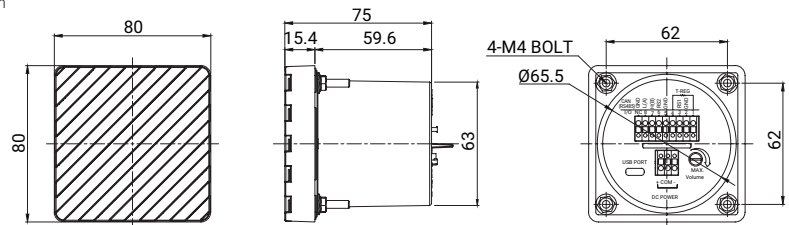

Wiring Instructions

·CPK-RS485

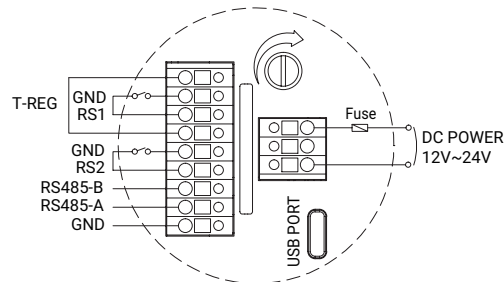

Ordering Specification

CPK-RS485	-	12/24
[Model number]		[Voltage]
CPK-RS485		12/24-DC12V-24V