

LED Strobe Beacons for Heavy-Duty Equipment

QA125HLS / QA125HLSP



Adopted Qlight's new developed light diffusion system.

PRODUCT SPECIFICATION

QA125HLS | QA125HLSP

Materials Lens-PC, Housing-PC
Ambient operating temperature -30°C to +50°C
Protection rating IP66
Vibration resistant and shock-proof
 can withstand 15g of vibration and 50g of shock
Flashing rate 60-80 flashes/min

- Ability to compensate for signal attenuation phenomenon that occurs during daytime operation with a powerful xenon lamp.
- Can select between pole mount and direct mount type to fit your application needs.

QA125HLS LED Strobe Beacons

Model number	Voltage	Current	Certificates	Weight	Color
QA125HLS	DC12V-24V	Max.1.650A	-	0.55kg	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; border-radius: 50%; margin-right: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: yellow; border-radius: 50%; margin-left: 10px; margin-right: 5px;"></div> A-Amber </div>

· Flashing rate: 60-80 flashes/min, Outer diameter: 125mm

※ DC type model has a free-voltage range of 10V-30V.

QA125HLSP LED Strobe Beacons


Model number	Voltage	Current	Certificates	Weight	Color
QA125HLSP	DC12V-24V	Max.1.650A	-	1.00kg	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; border-radius: 50%; margin-right: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: yellow; border-radius: 50%; margin-left: 10px; margin-right: 5px;"></div> A-Amber </div>

· Flashing rate: 60-80 flashes/min, Outer diameter: 125mm

※ DC type model has a free-voltage range of 10V-30V.

Technical Diagram

Units: mm

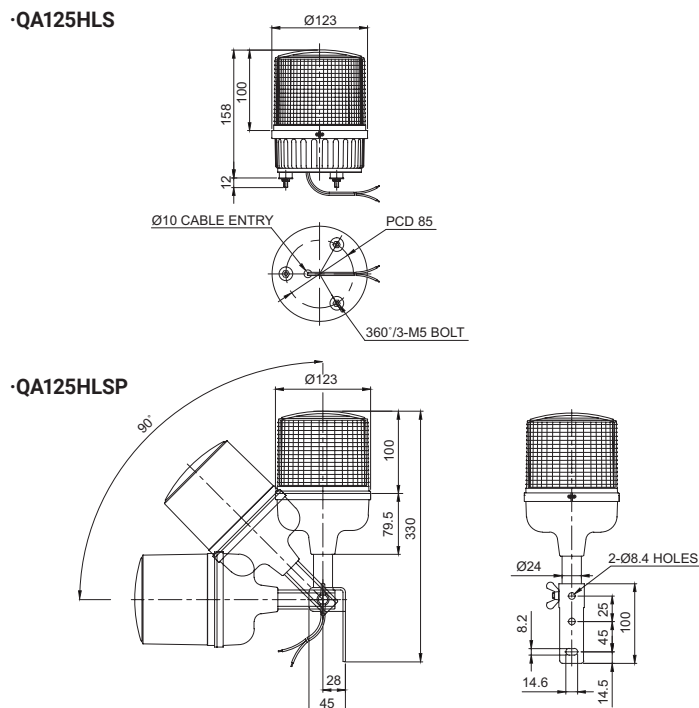

Wiring Instructions

- External power line
UL1015 AWG18(0.75sq) x 2C 400mm
- This product can be wired regardless of polarity.

Ordering Specification

QA125HLS	-	12/24	-	R
[Model number]		[Voltage]		[Color]
QA125HLS QA125HLSP		12/24-DC12V-24V		<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; border-radius: 50%; margin-right: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: yellow; border-radius: 50%; margin-left: 10px; margin-right: 5px;"></div> A-Amber </div>